

# Saket

## SCULPTING STORIES IN EVERY CLAY...

Selfie Ceramic company started as an Exporter and manufacturer of different Porcelain Tiles. Since its existence in the industry, it has gained a high reputation for world-class quality and excellent customer service.

The manufacturing unit in the company is equipped with all the modern technology that leads to zero human error and intense automation. With this, Selfie Ceramic has emerged at the most trusted brand in the tile industry.





# DECOR

Series

## ELEVATE INTERIORS WITH A STRIKING PUNCH.

Decor Series tiles feature raised patterns and Moroccan patterns that create a tactile experience. The textures add depth and dimension, making floors more engaging and visually interesting.

These tiles often showcase intricate and vibrant designs, ranging from geometric and Moroccan patterns to abstract art. The dynamic nature of the designs ensures that they become a focal point in any room, capturing attention and adding character.


The interplay of light and shadow on the textured surfaces creates a dynamic visual effect that changes throughout the day. This adds an element of movement and life to the space, keeping it continuously fresh and intriguing.

## LUXURY THAT ENRICHES LIFESTYLE.

Decor Series tiles are synonymous with contemporary design. Their bold and innovative patterns make them a perfect choice for modern interiors, providing a sleek and stylish look that stands out.

Suitable for a variety of settings, punch effect tiles can be used on Floors, backsplashes, and even as artistic accents. Their versatility allows them to enhance different areas, adding a touch of sophistication and creativity.

These tiles are designed to make a statement. Whether used in small sections, they bring a sense of drama and elegance, making any space feel more luxurious and thoughtfully designed.

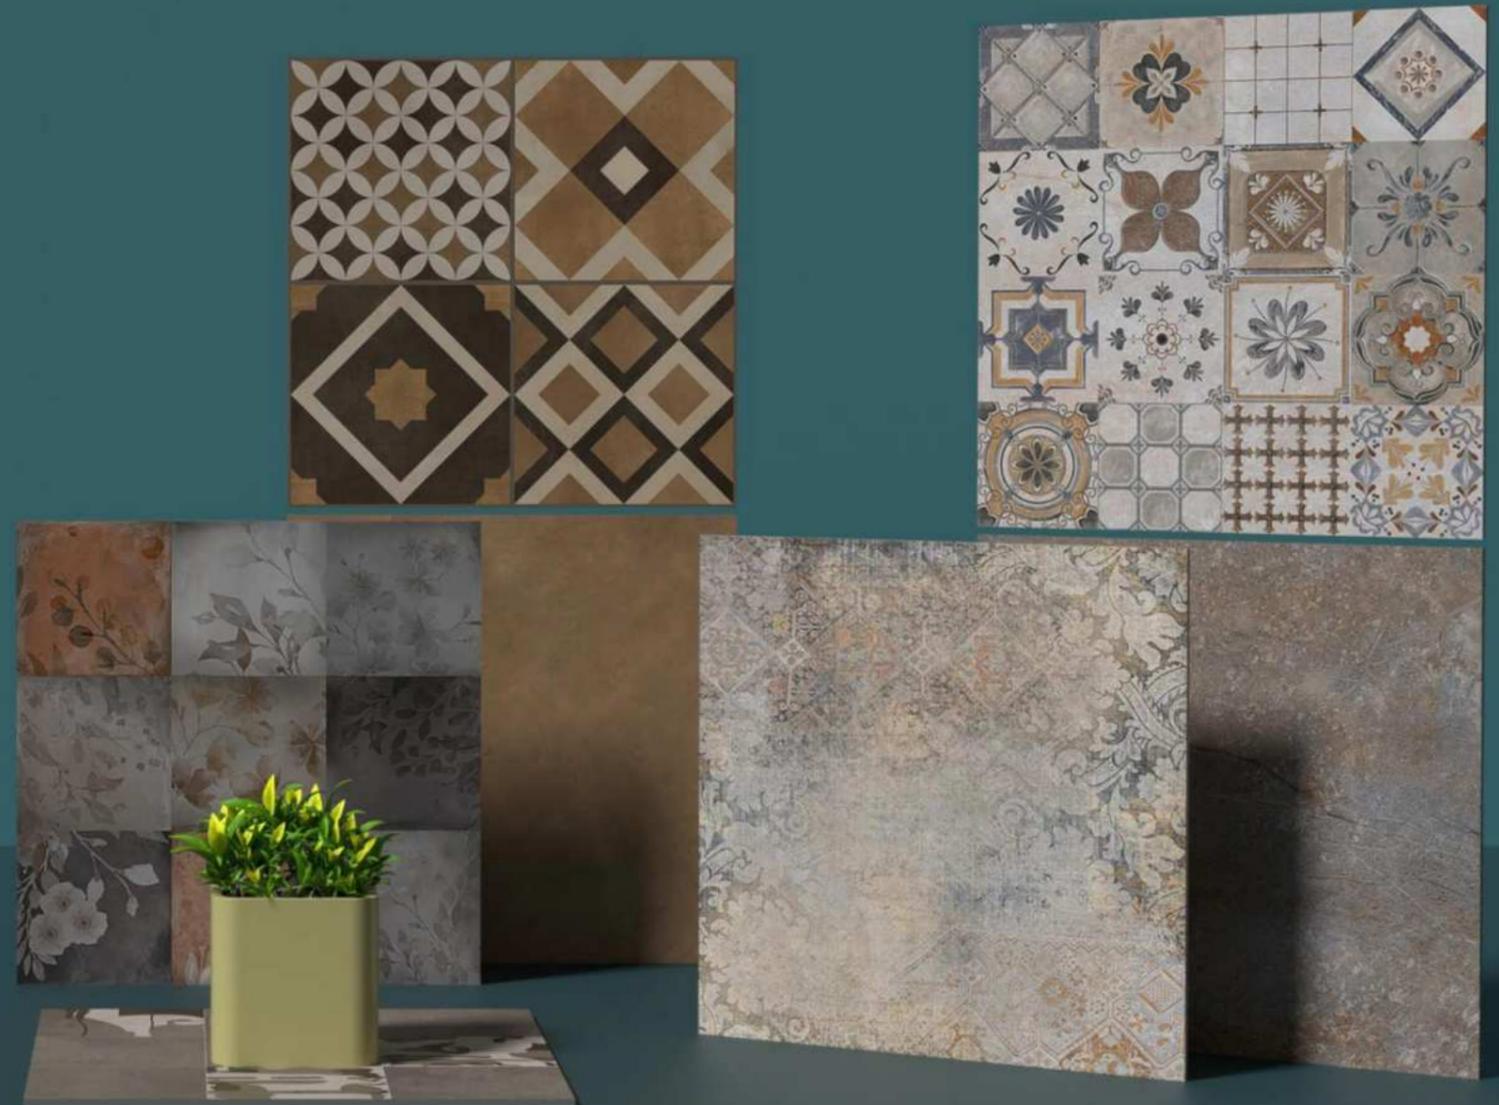



## ARTISTIC & TECHNICAL PERFECTION WITH ELEGANCE DESIGNS.

### AESTHETIC SIZE

A complete and versatile project from the size available in the ceramics market, 600x600MM and 9mm thick to the most common size, 600x600MM, 9mm thick, passing through a full range of intermediate sizes.

### AWESOME STYLE

The ceramic design interprets different inspirations, ensuring maximum aesthetic appeal in any type of environment and giving each its own style.

### EXTRAORDINARY WEIGHT

The Tiles are easy to move and handle as they are only 9 mm thick, ensuring lightness despite their large size.

### ADVANTAGES



Series **6001**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-3 DARK R-1

Series **6003**

600x600MM | 2'x2'



HIGH-LIGHTER R-1 DARK R-1

Series **6002**

600x600MM | 2'x2'



HIGH-LIGHTER R-1 DARK R-1

Series **6004**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

**PRODUCT INFORMATION**

600x600MM  
2'x2'  
MATT SURFACE





Series **6005**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-2 DARK R-1

Series **6006**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-2 DARK R-1

Series **6007**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-2 DARK R-1

Series **6008**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

**PRODUCT INFORMATION**

600x600MM  
2'x2'  
MATT SURFACE





Series **6009**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6011**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6010**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6012**

600x600MM | 2'x2'




LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

**PRODUCT INFORMATION**

600x600MM  
2'x2'  
MATT SURFACE



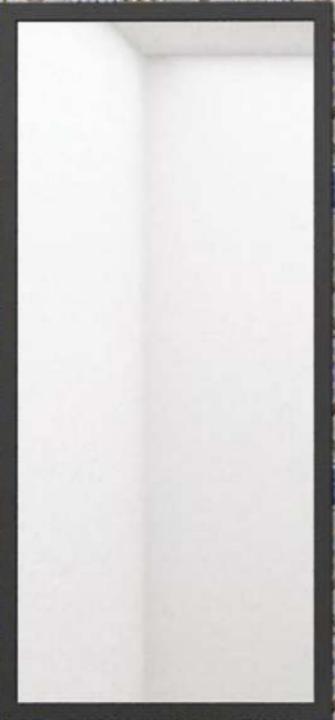

Series **6013**


600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6015**


600x600MM | 2'x2'

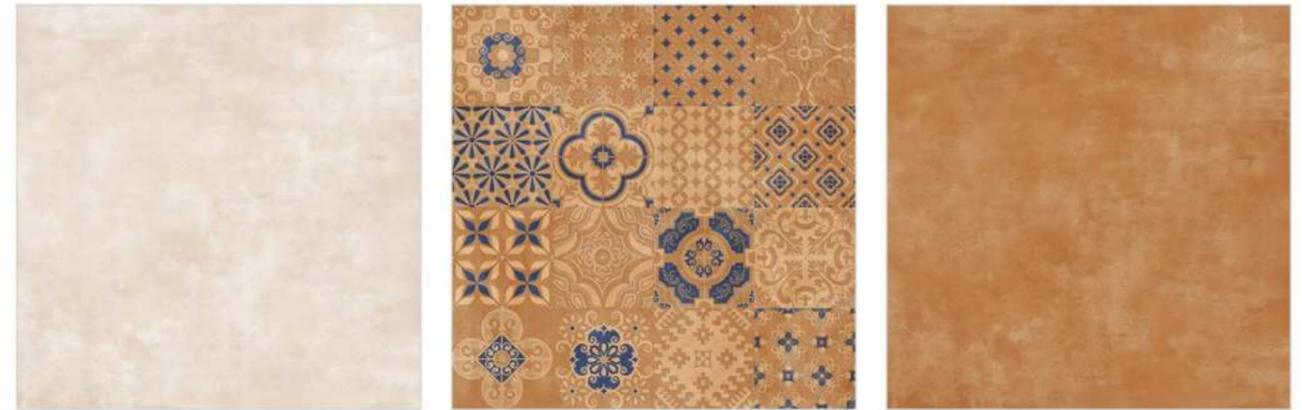

LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6014**

600x600MM | 2'x2'

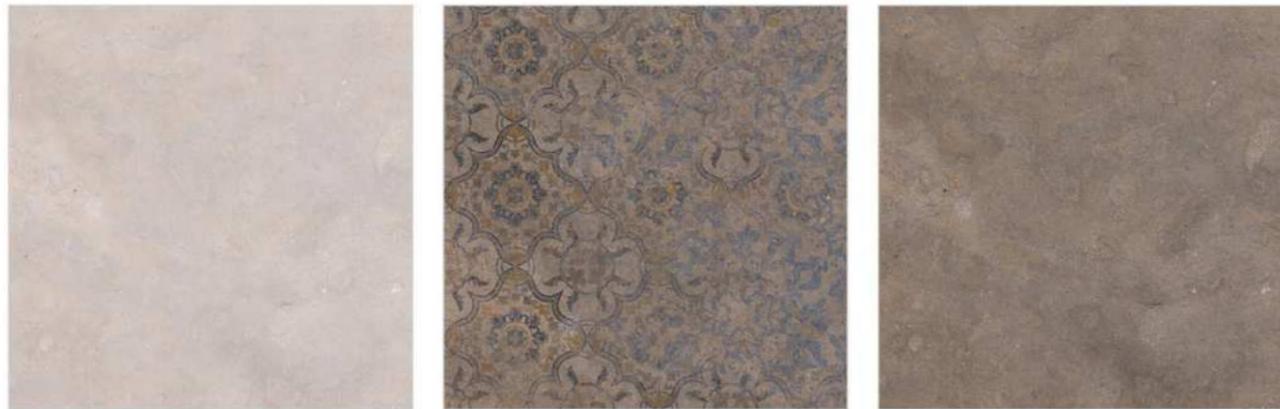

LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6016**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

**PRODUCT INFORMATION**

600x600MM  
2'x2'  
MATT SURFACE





Series **6017**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6019**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6018**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6020**

600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

**PRODUCT INFORMATION**


600x600MM  
2'x2'  
MATT SURFACE





Series **6021**

600x600MM | 2'x2'

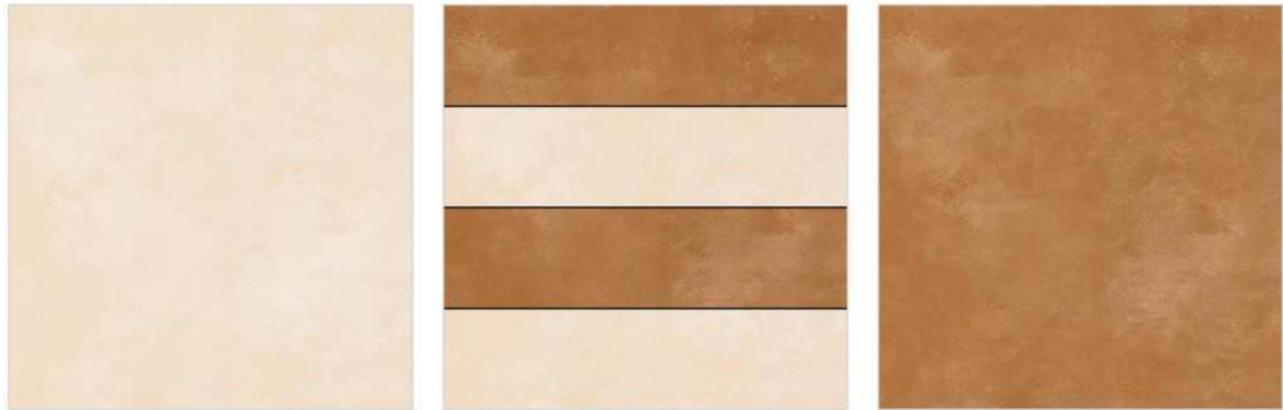

LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6023**


600x600MM | 2'x2'



LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6022**

600x600MM | 2'x2'

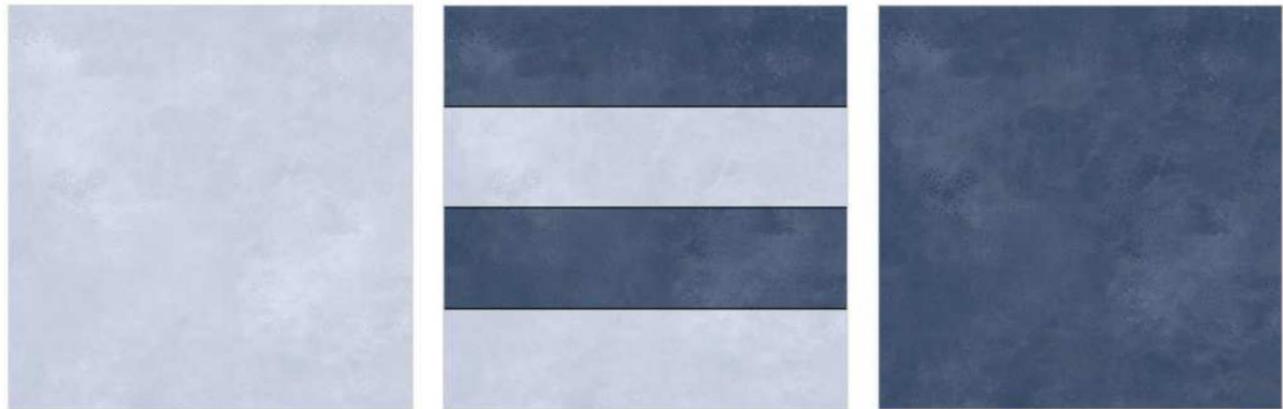

LIGHT R-1 HIGH-LIGHTER R-1 DARK R-1

Series **6024**

600x600MM | 2'x2'



LIGHT R-1

**PRODUCT INFORMATION**


600x600MM  
2'x2'  
MATT SURFACE





Series **6025**

600x600MM | 2'x2'

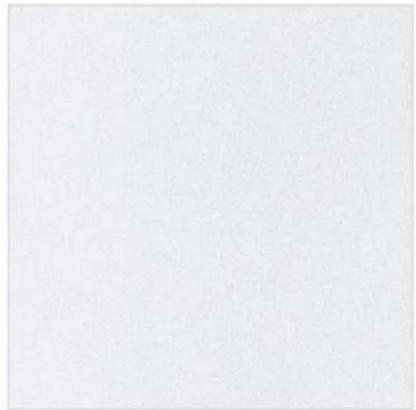


LIGHT

R-1



HIGH-LIGHTER

R-1

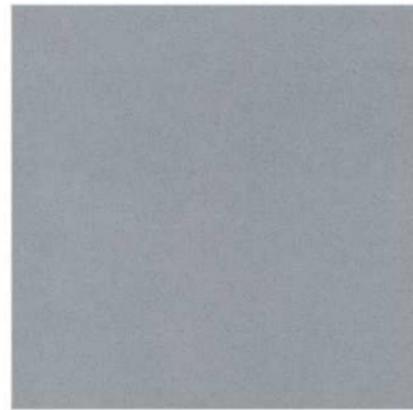

DARK

R-1



**PRODUCT INFORMATION**



600x600MM  
2'x2'

MATT SURFACE





## TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018 / EN14411 Gr.B1a	MEAN VALUE OF SELFIE	TEST METHOD
<b>Regulatory Properties</b>			
Deviation in length and width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in thickness	± 5.00 % (±0.50mm)	± 4.00 %	ISO 10545-2
Straightness in side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10 %	ISO 10545-2
Surface flatness central curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness edge curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness warpage	± 0.40 % (±1.80mm)	± 0.10 %	ISO 10545-2
Surface quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(For Plain Color)	ΔE < 1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value > 90	Glossmeter 60°
Glossiness (Matt)	as per mfg.	3° < GLOSS < 7°	Glossmeter 60°
Glossiness (satin/Posh)	as per mfg.	7° < GLOSS < 18°	Glossmeter 60°
<b>Structural Properties</b>			
Water absorption	0.50 % ± Ev ± 3.00 %	0.060 % ± Ev ± 3.00 %	ISO 10545-3
Bulk density	as per mfg.	> 2.28 gm/cc	ISO 10545-3
<b>Massive Mechanical Properties</b>			
Modulus of rupture	Min. 30.0 N/mm <sup>2</sup>	Min. 35.0 N/mm <sup>2</sup>	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1100.0 N	Min. 1300.0 N	ISO 10545-4
Breaking strength thickness ≥7.5(For ≥15mm)	Min. 1100.0 N	Min. 1800.0 N	ISO 10545-4
<b>Surface Mechanical Properties</b>			
MOH'S hardness	as per mfg.	Polished Min 4* / Satin, Posh & Matt Min 6	BS EN 15771
Surface abrasion resistance	as per mfg.	Polish Min. Class 2, Satin & Posh Min. Class 3, & Matt Min. Class 4	ISO 10545-7
Deep abrasion resistance	Max. 175mm <sup>3</sup>	Max. 132mm <sup>3</sup>	ISO 10545-6
<b>Thermal Hydrometric Properties</b>			
Moisture expansion	Max. 0.06%(0.6mm/m)	0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 <sup>-6</sup>	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR)	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
<b>Chemical Properties</b>			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLA**	ISO 10545-13
Resistance to high concentrate acid and alkalis unglazed	as per mfg.	Min. Class GHB**	ISO 10545-13
<b>Safety Properties</b>			
Skid resistance (COF-WET PENDULAM)##	as per mfg.	Glossy P0(<12), Satin, Posh ≥P1(12-24) Matt ≥P2(25-34)	BS 7976-2
Slip resistance - (Satin / Matt (DCOF) (R value)##	as per mfg.	R9 to R13**	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

## PACKING DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT
GVT-PGVT	600x 600mm	8.5mm	4 pcs.	1.44 sq. mtr.	25 KG (APPROX)

# Saket