

**Saket**

---

**PARKING  
VITRIFIED  
TILES**

**500x**

**500MM**

# Saket

## 50x 50cm


| PARKING  
VITRIFIED  
TILES

.....

All about an adventurous tile which has immense toughness with great look that complements every area.






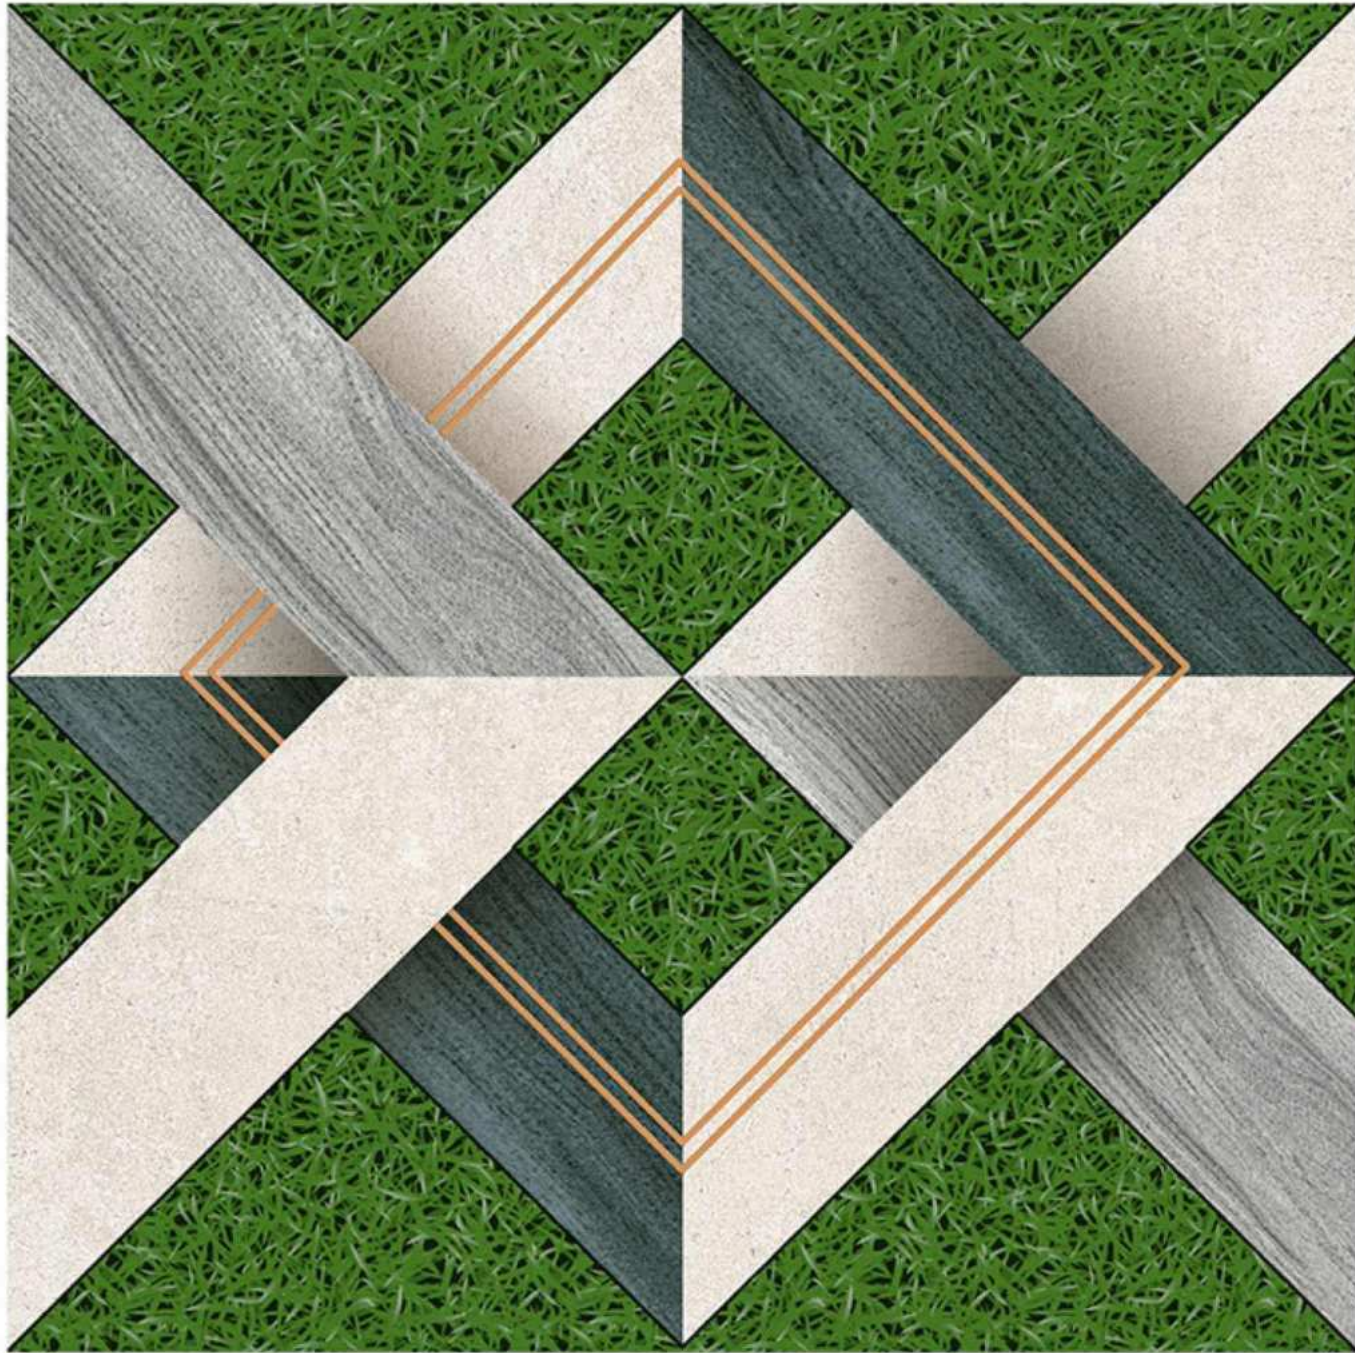

## 9001

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

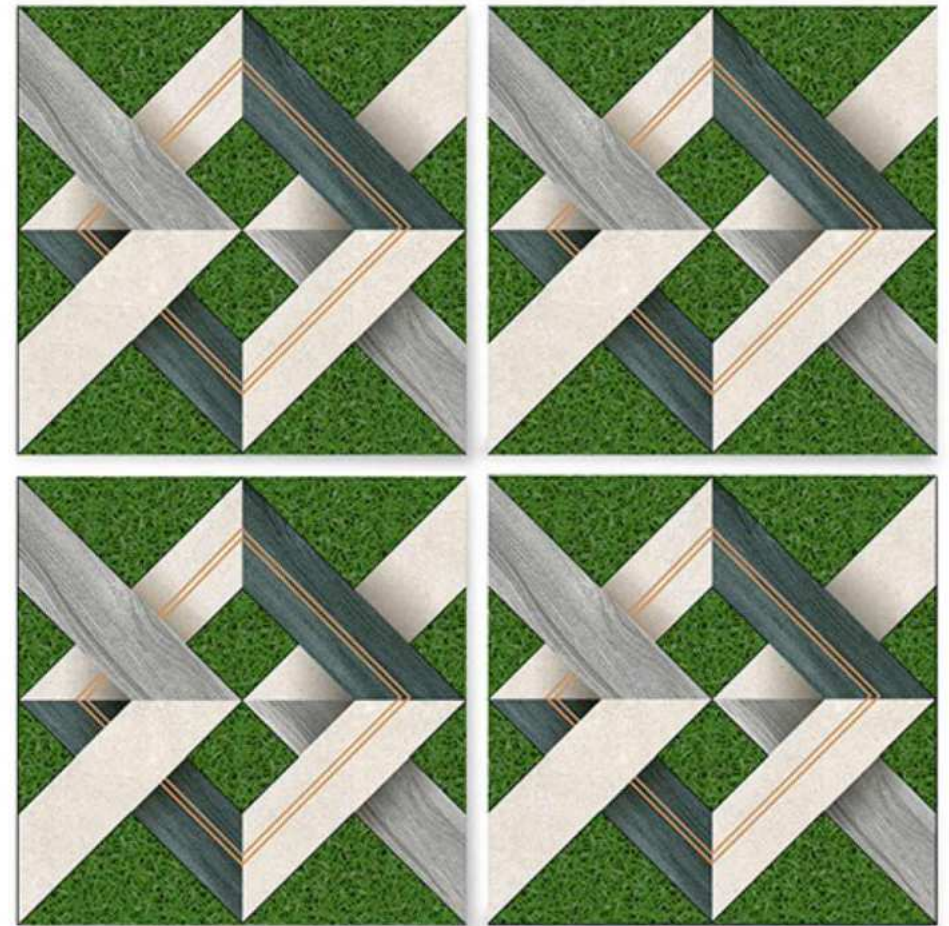

### Applications












## 9003

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

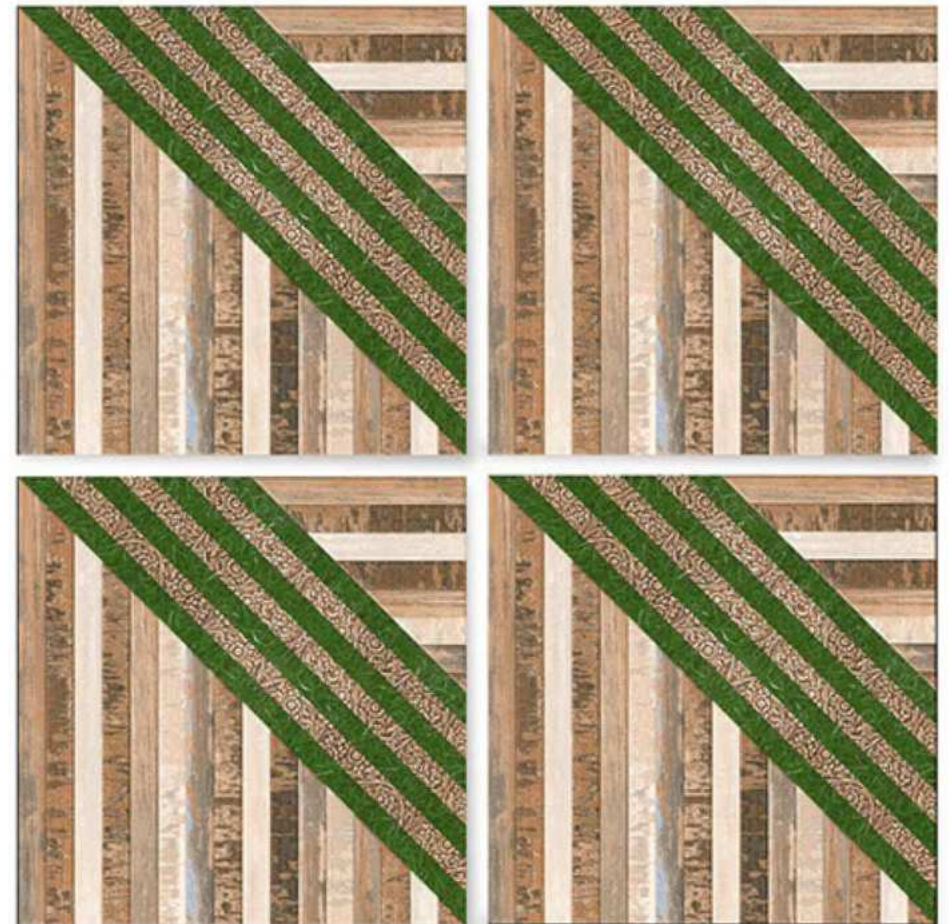

### Applications




Residence Commercial Malls & Restaurants Public Area










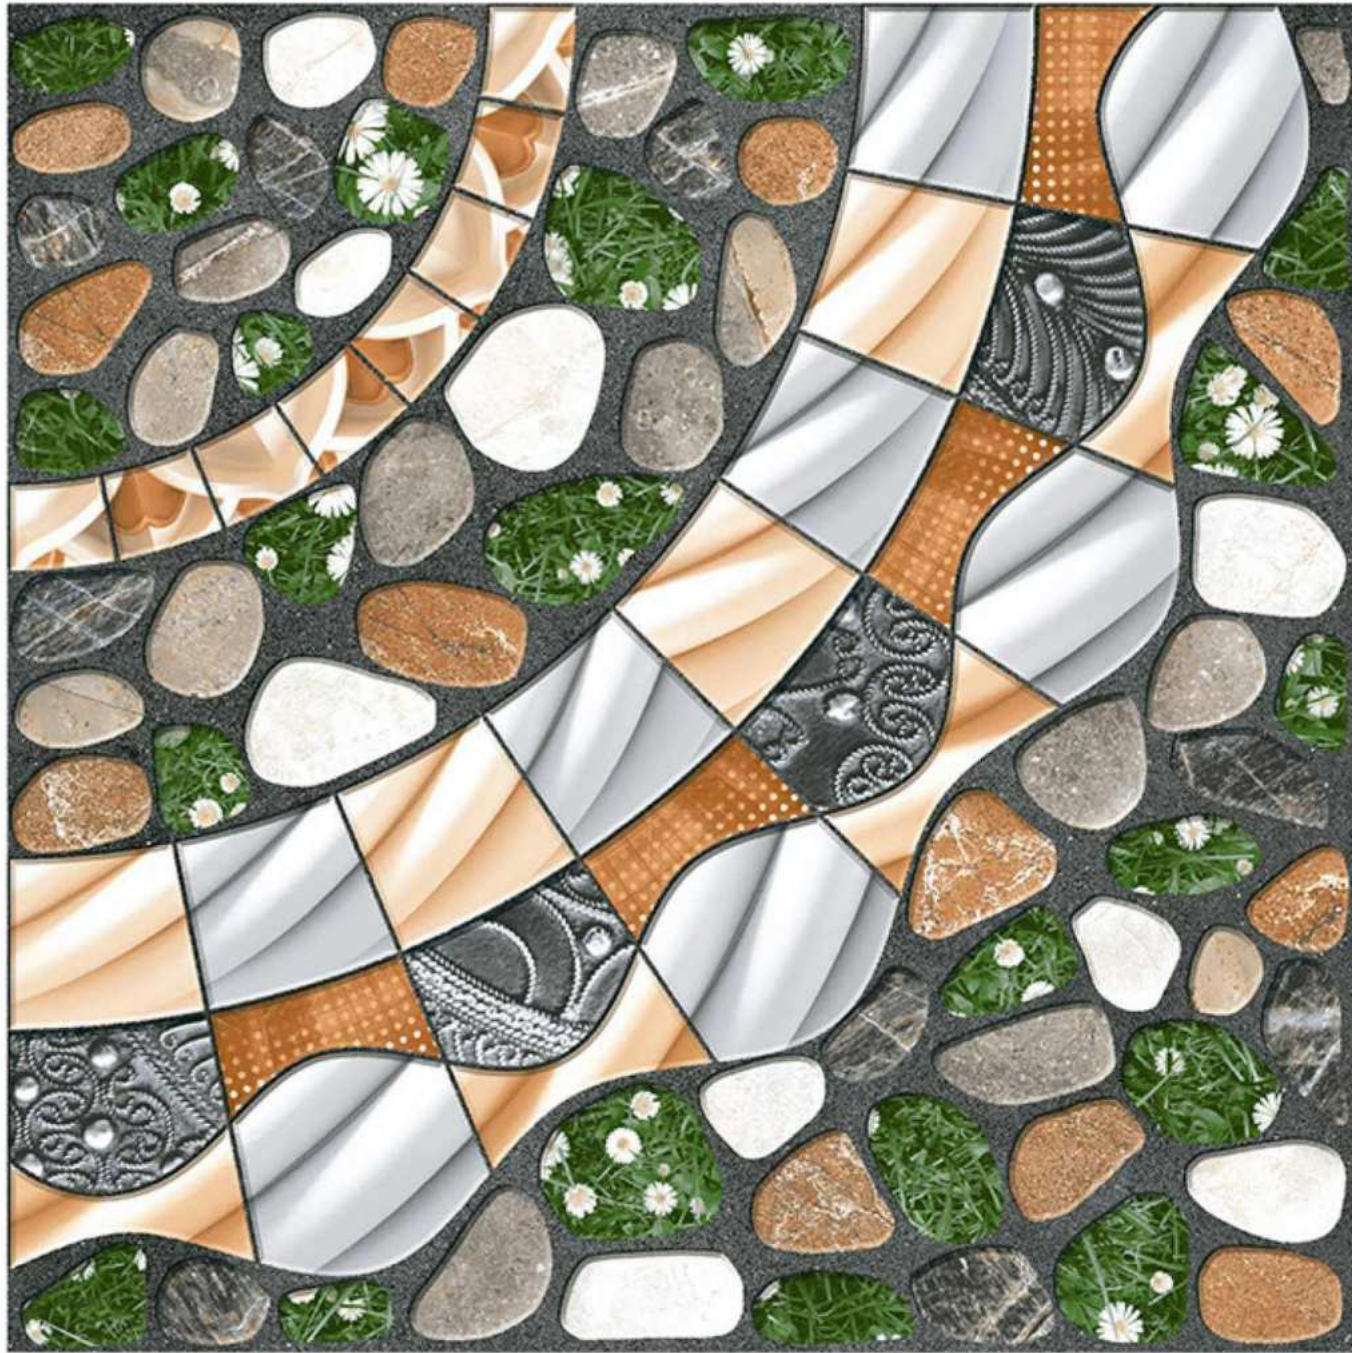

## 9004

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

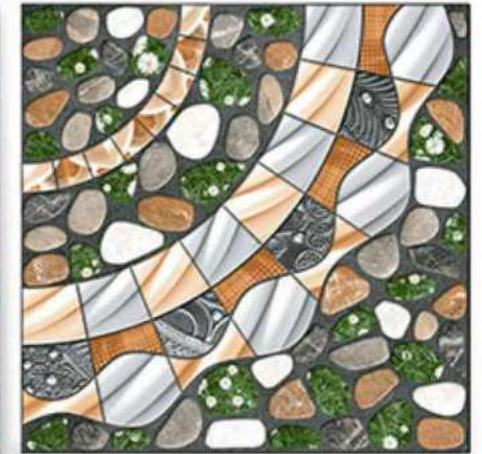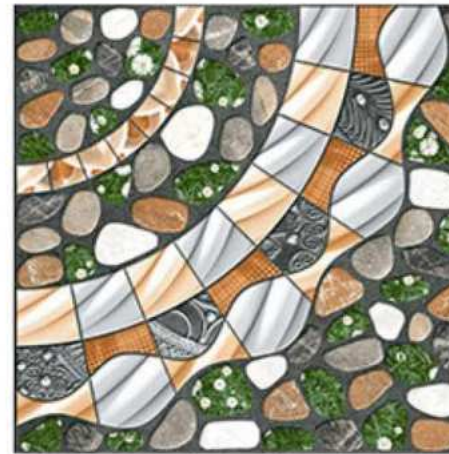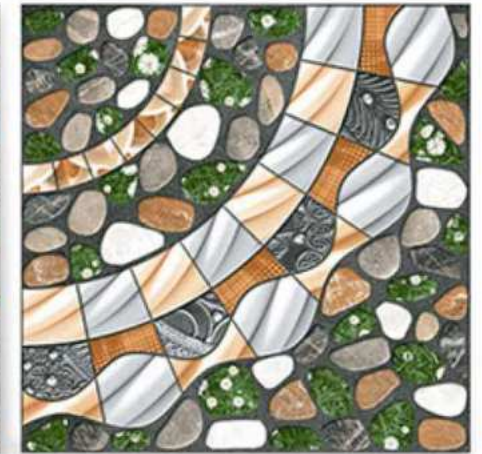

### Applications



Residence



Commercial



Malls &  
Restaurants




Public  
Area








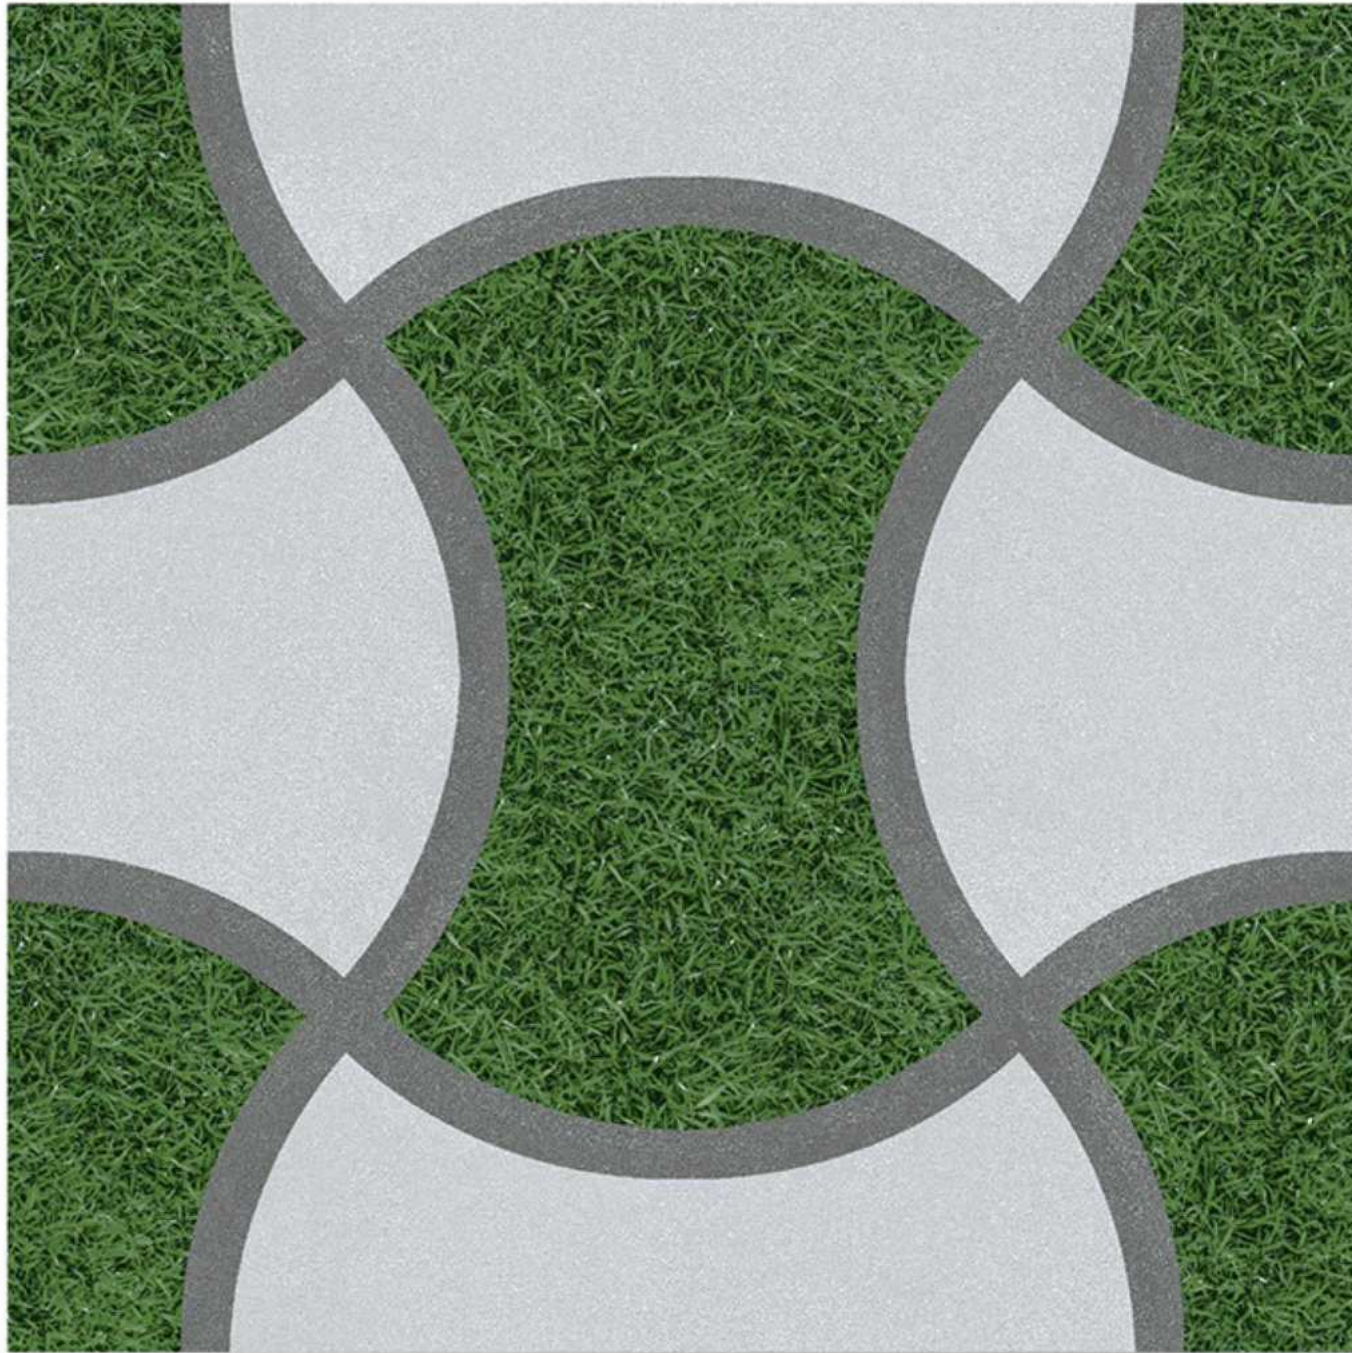

## 9005

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

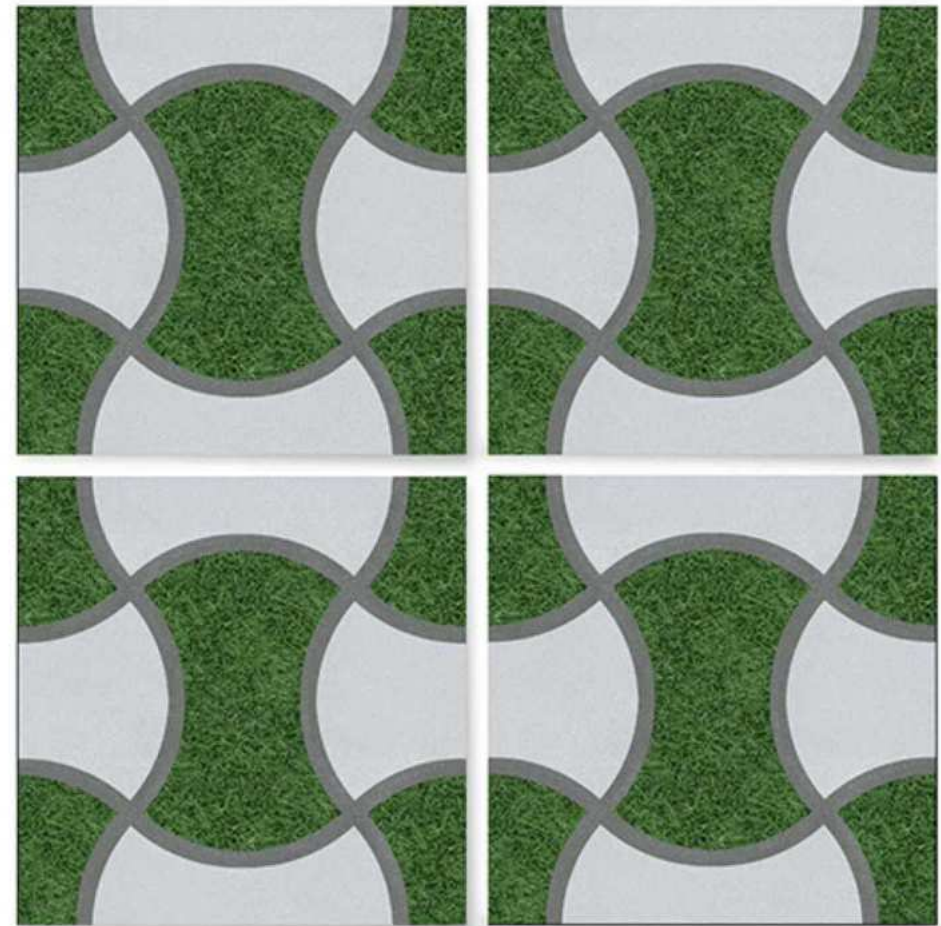

### Applications












## 9009

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

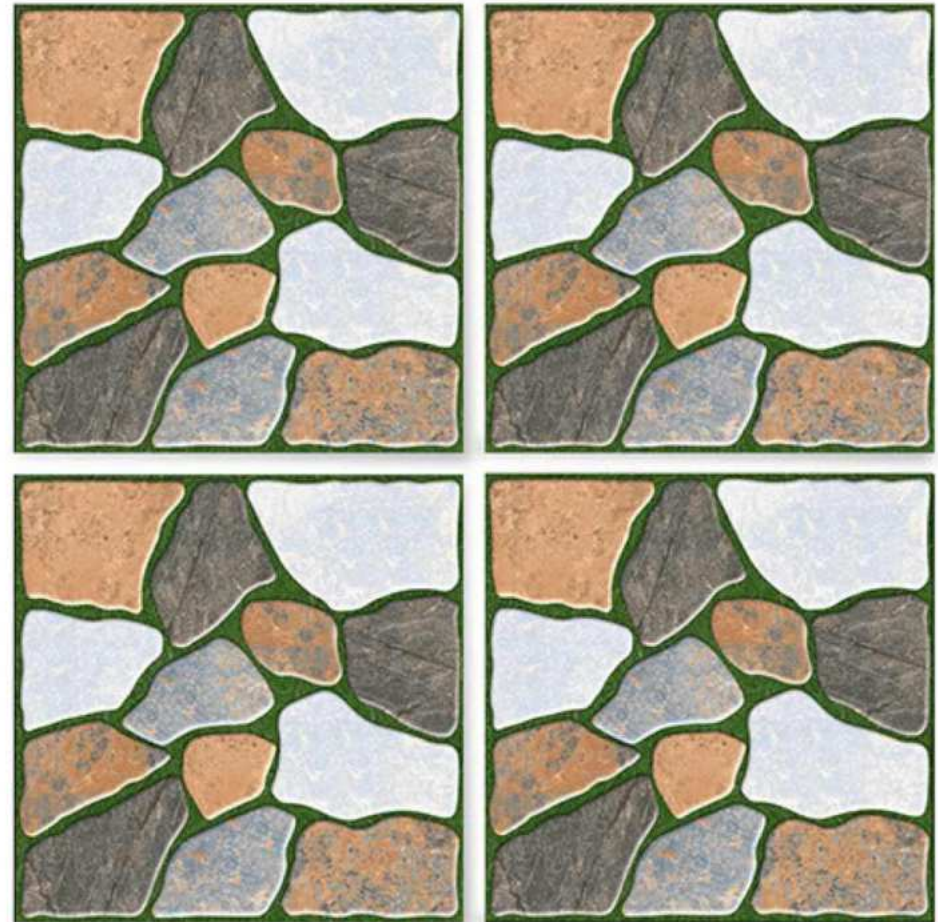

### Applications



Residence

Commercial


Malls & Restaurants

Public Area









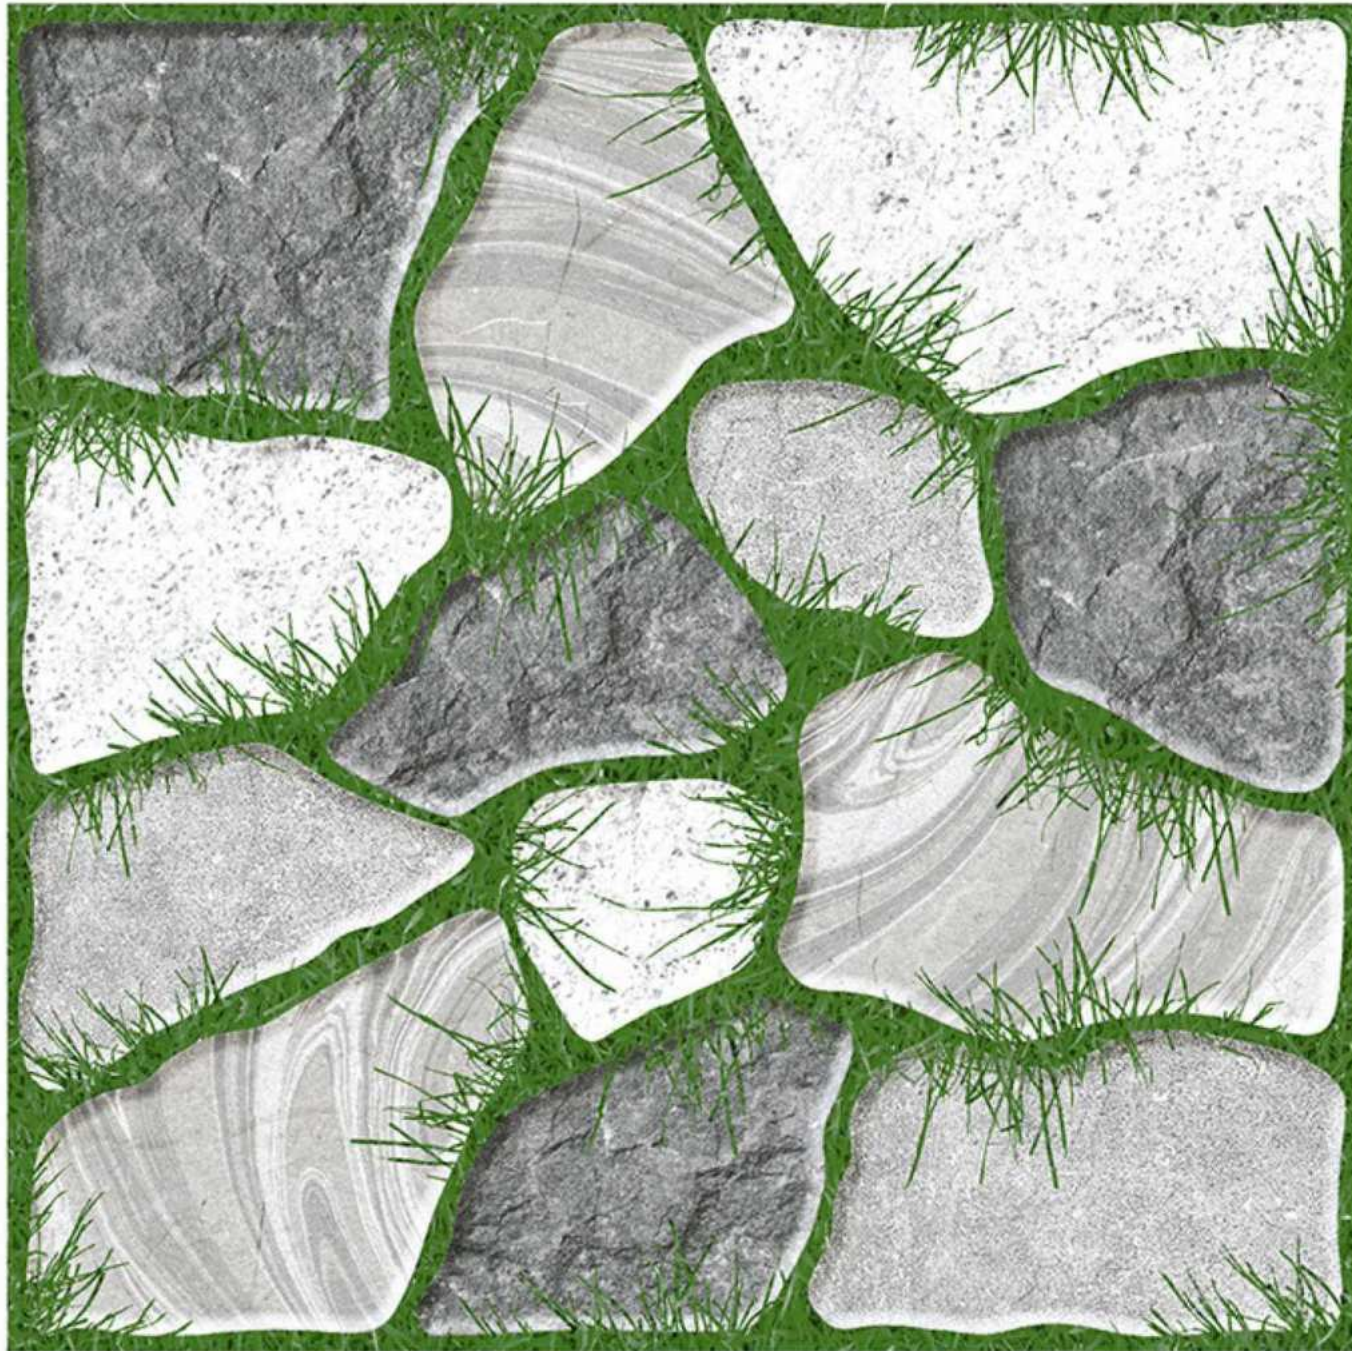

## 9010

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

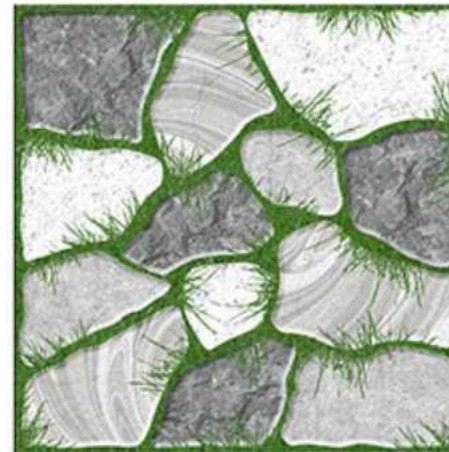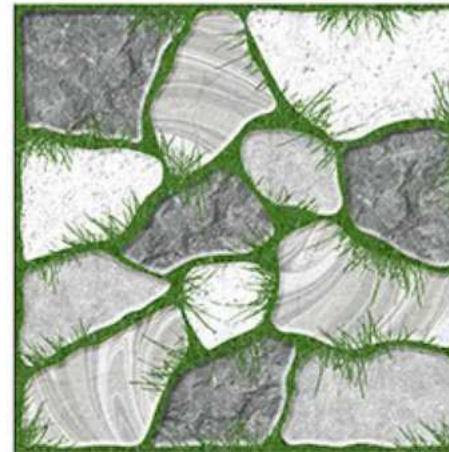

### Applications



Residence



Commercial



Pub &  
Restaurants



Public  
Area










## 9012


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

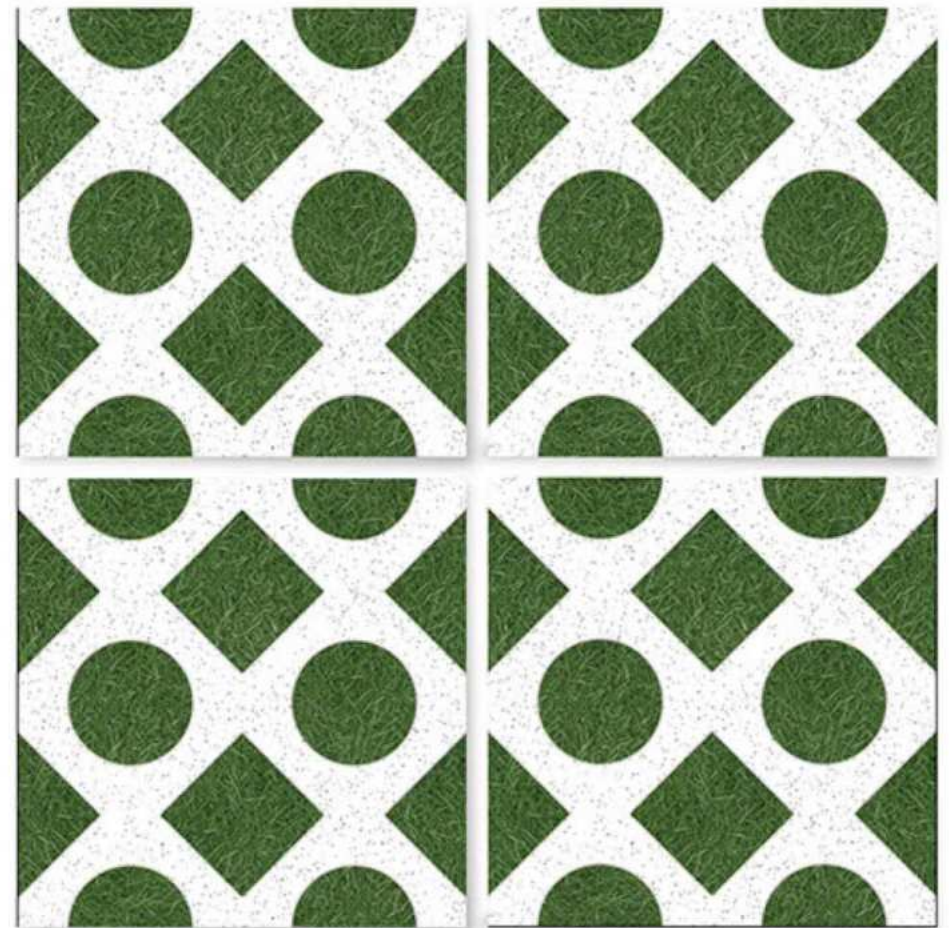


### Applications





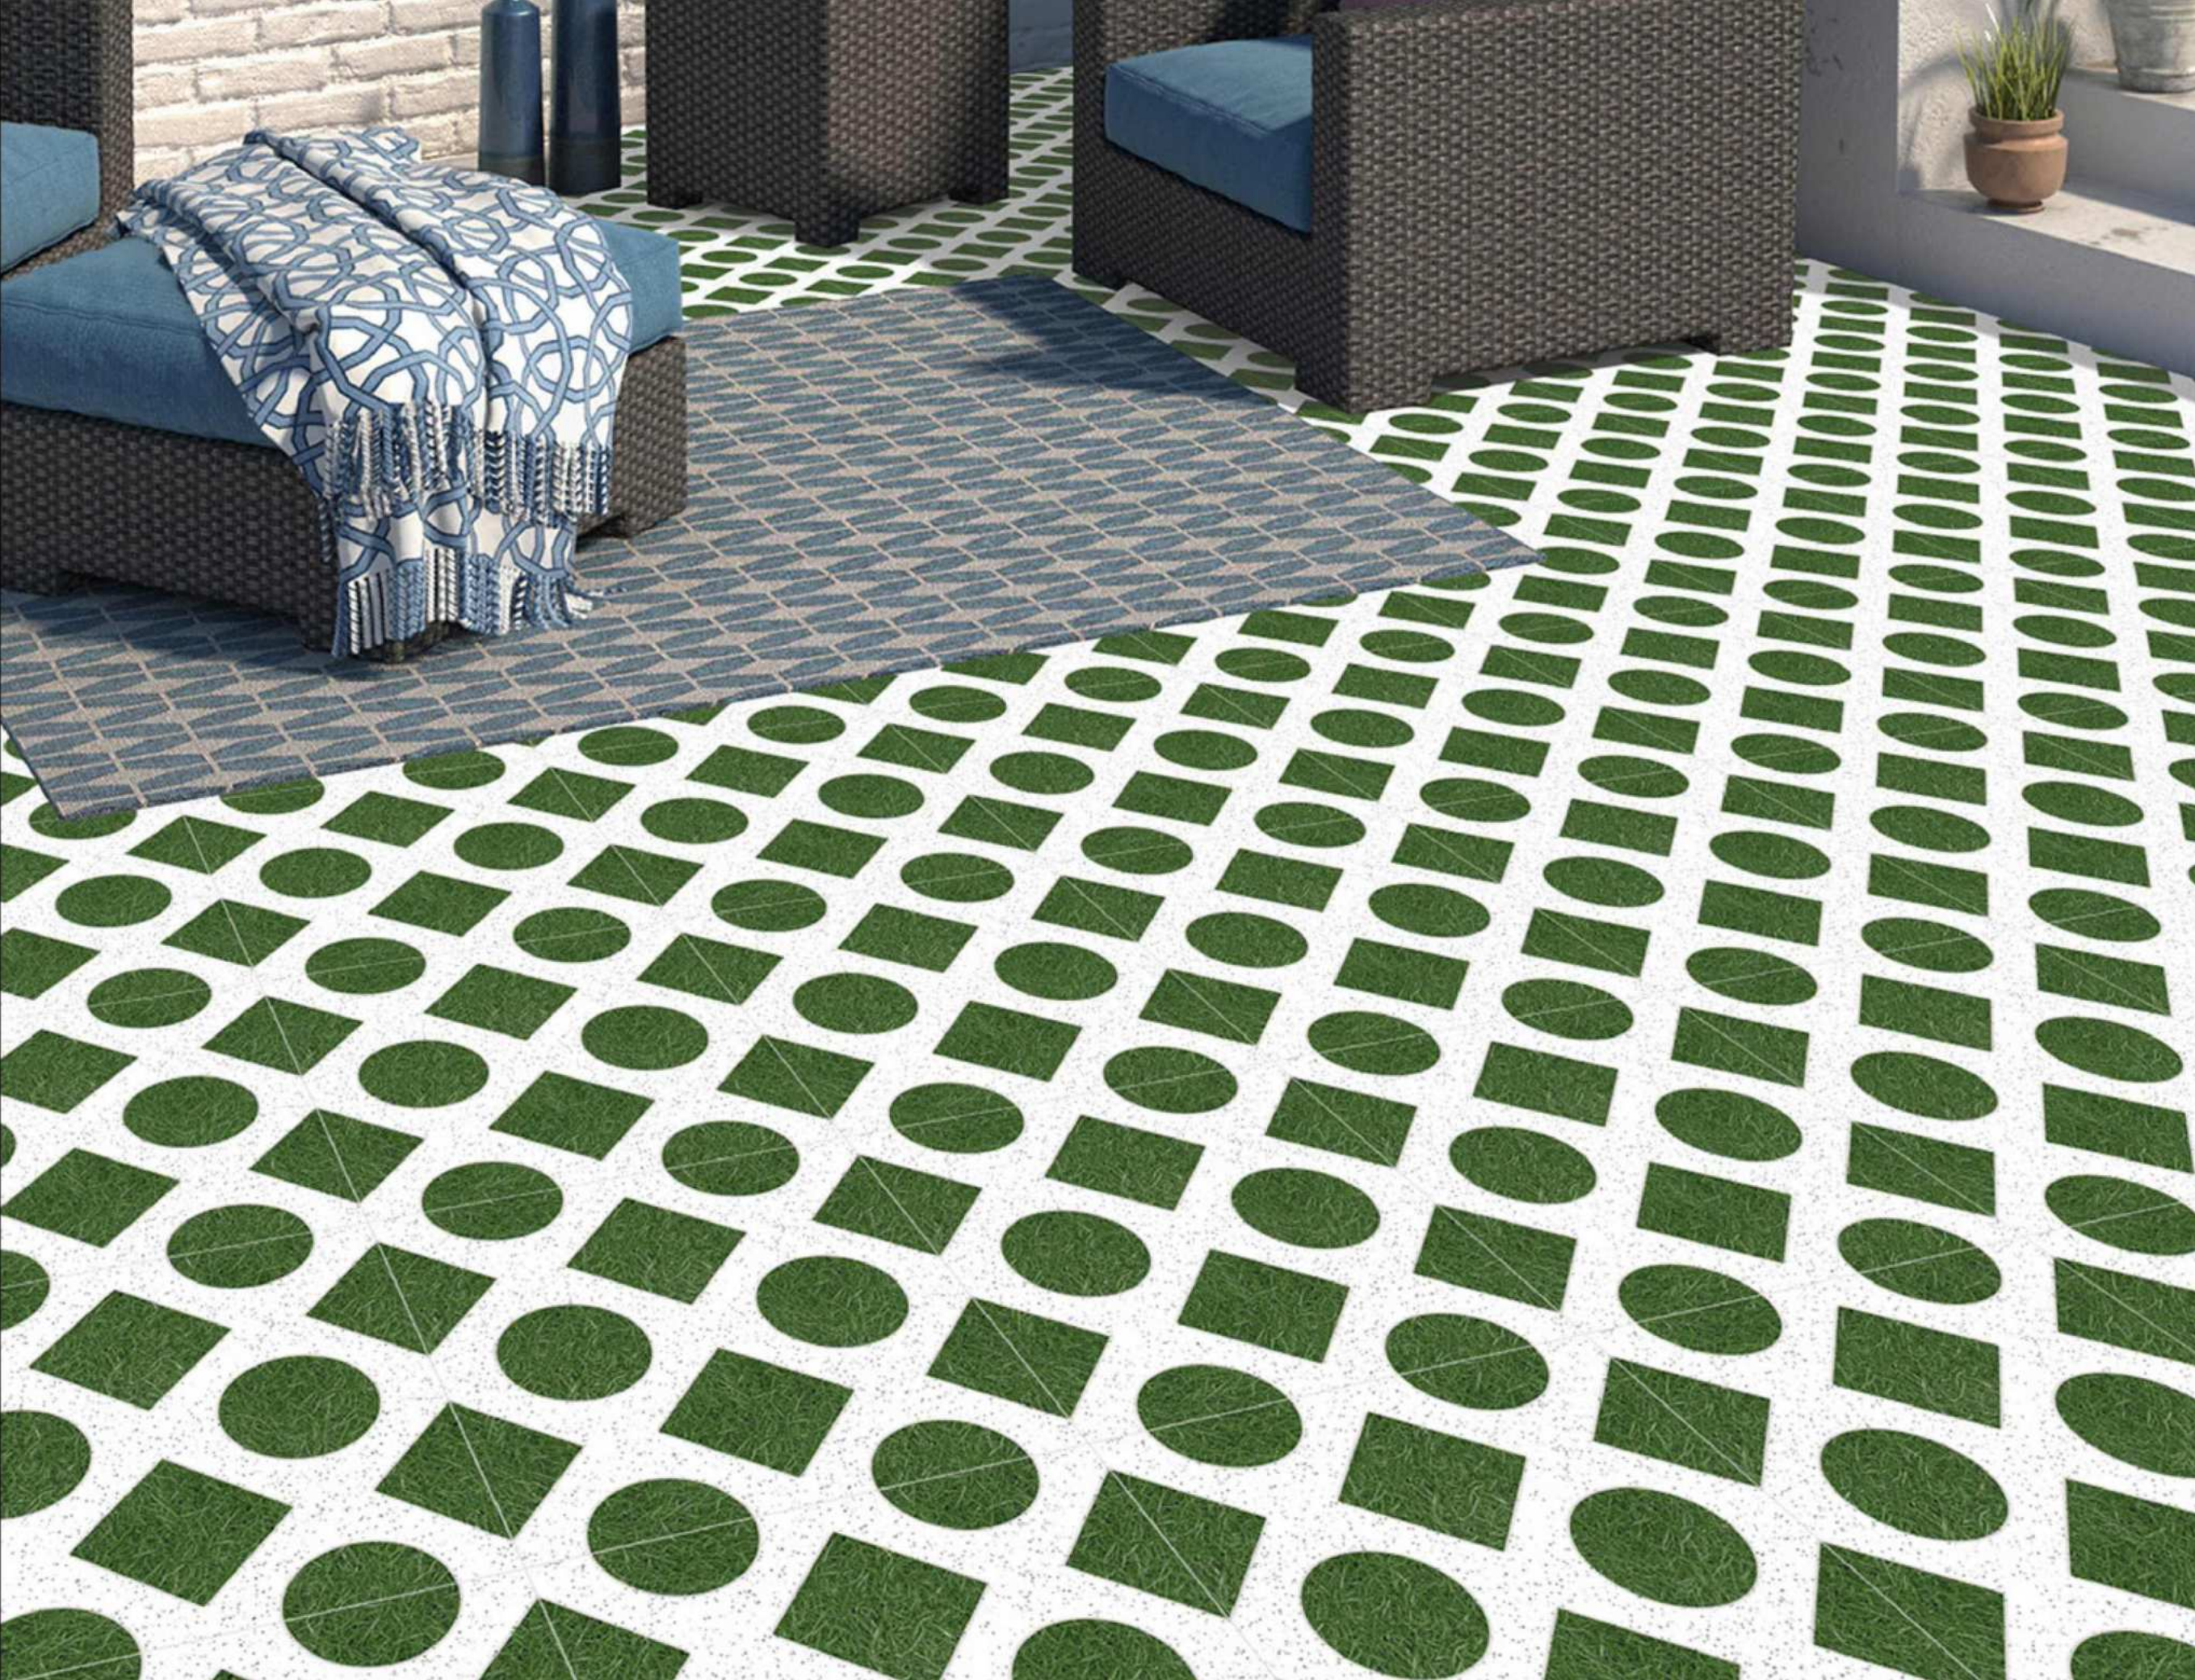




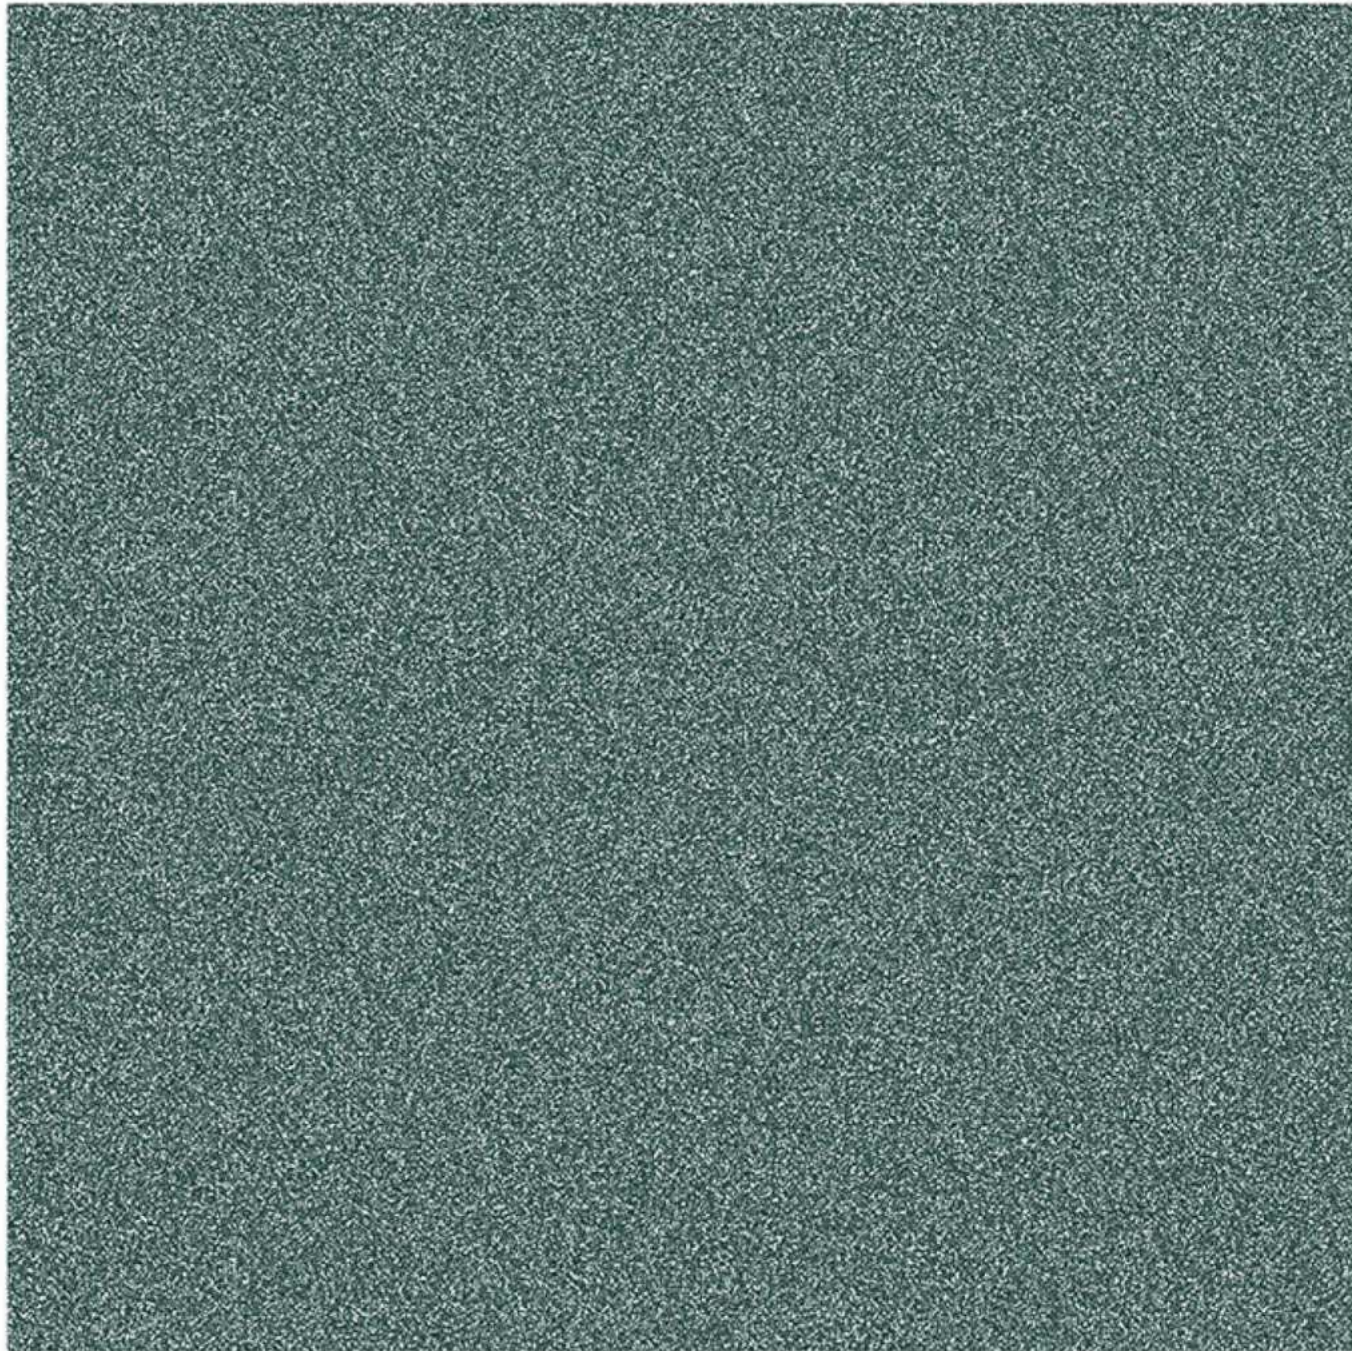

## 5054

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

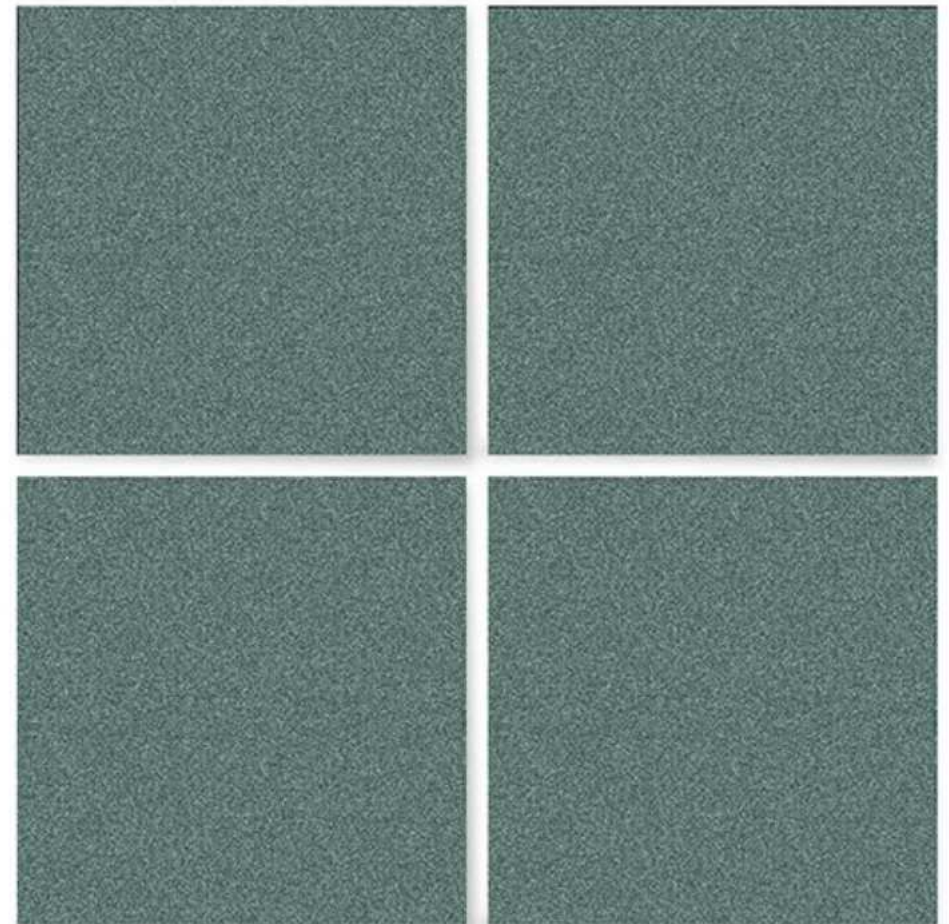

### Applications









# TECHNICAL SPECIFICATION

CHARACTERISTIC	International Std. ISO13006/EN 176 Group Bla	SAKETILES Value	Method of Testing
1. Deviation in Length	±0.6%	±0.1%	EN 98
2. Deviation in Thickness	±5%	±4%	EN 98
3. Straightness of Sides	±0.5%	±0.1%	EN 98
4. Rectangularity	±0.6%	±0.2%	EN 98
5. Surface Flatness	±0.5%	±0.3%	EN 98
6. Water Absorption *	<0.5%	<0.3%	EN 99
7. Mohs Hardness *	> 6	> 7	EN 101
8. Flexural Straightness *	> 27 N/mm <sup>2</sup>	> 47 N/mm <sup>2</sup>	EN 100
9. Abrasion Resistance	< 204 mm <sup>3</sup>	< 98 mm <sup>3</sup>	EN 102
10. Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11. Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12. Density (g/cc)	> 2	> 2.4	DIN 51082
13. Frost Resistance	Frost proof	Frost proof	EN 202
14. Chemical Resistance	No damage	No damage	EN 106
15. Thermal Shock Resistance	No damage	No damage	EN 104
16. Colour Resistance	No damage	No damage	DIN 51094
17. Thermal Expansion	< 9 x 10 <sup>-6</sup>	< 6 x 10 <sup>-6</sup>	EN 103
18. Stain Resistance	Resistant	Resistant	ISO 10545-14
19. Moisture Expansion	Nil	Nil	ISO 10545-10
20. Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	DIGITAL 500X500 MM	12 MM	3 PCS	0.76	16.5 Kgs



Thank you

**Saket**

**SAKET TILES INDIA LLP**

[info@sakrttiles.com](mailto:info@sakrttiles.com)

[export@sakettiles.com](mailto:export@sakettiles.com)

Survey No.454,  
At-Shapar,Jashmatgadh,Jetpar Road  
opp-pavadiyari bas stand, Morbi, Gujarat-363642