

Saket

**PARKING
VITRIFIED
TILES**

400x

400MM


40x 40cm

| PARKING VITRIFIED TILES


.....

All about an adventurous tile which has immense toughness with great look that complements every area.



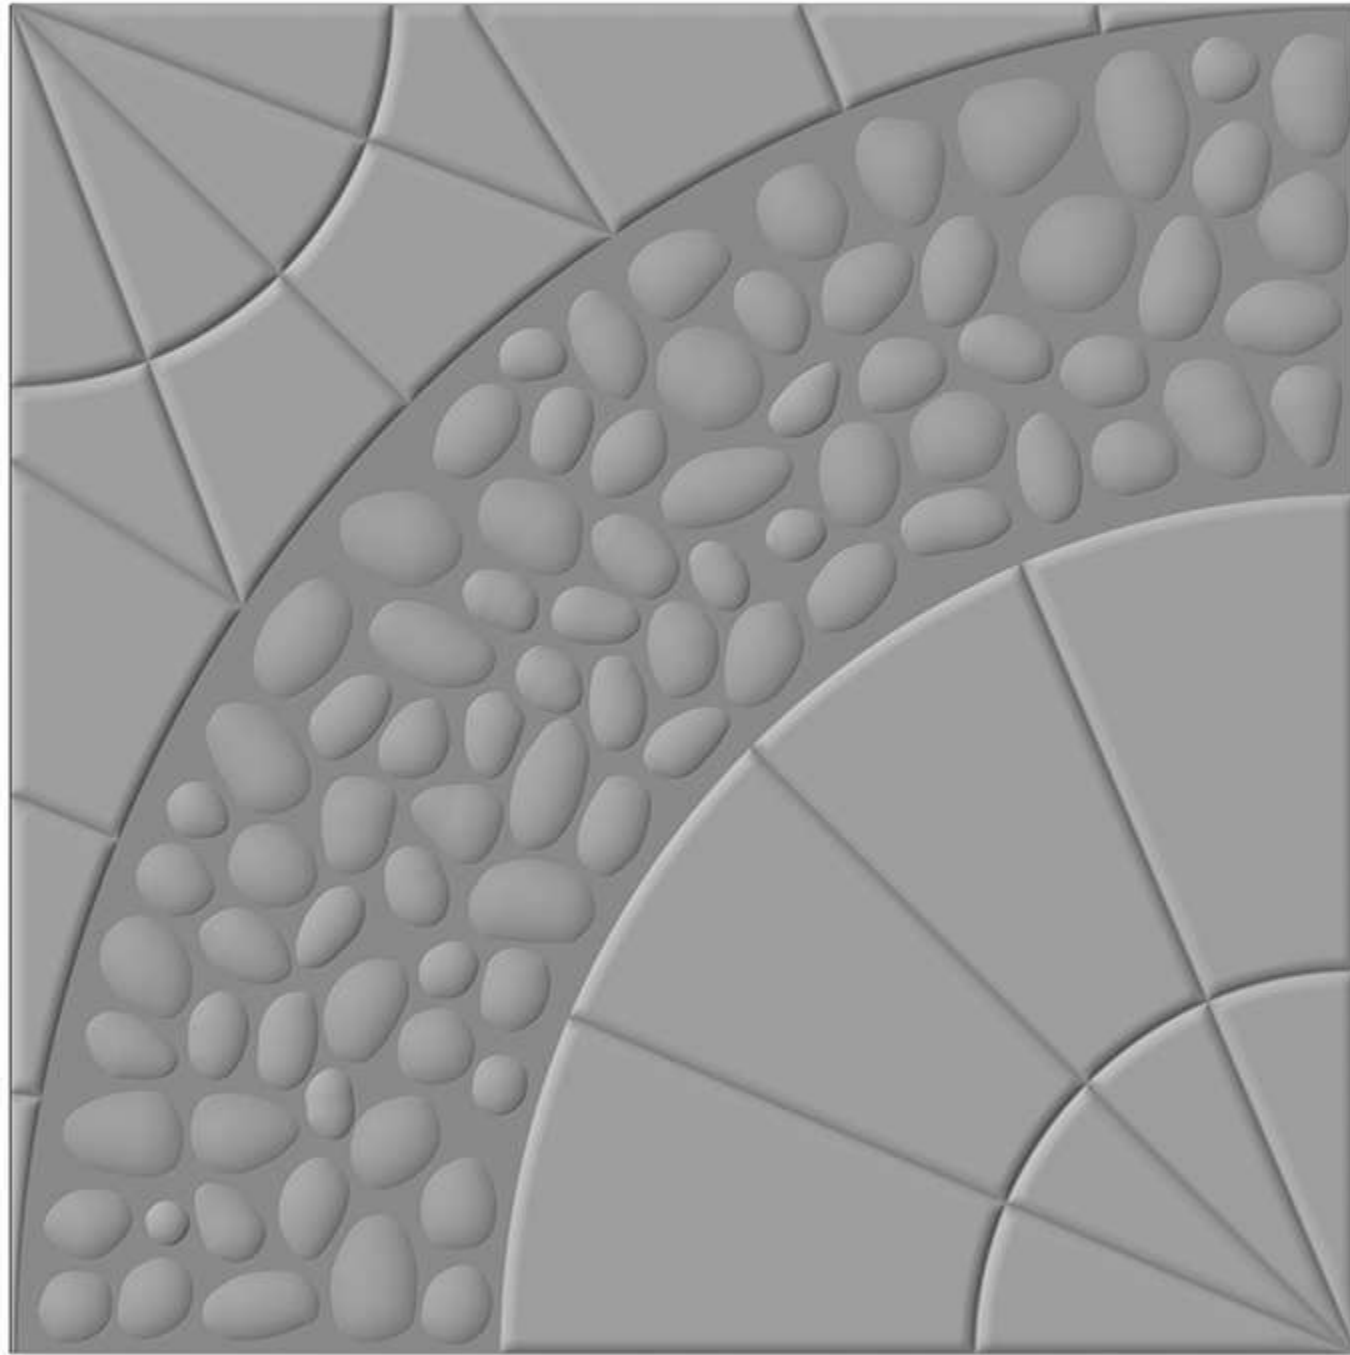


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

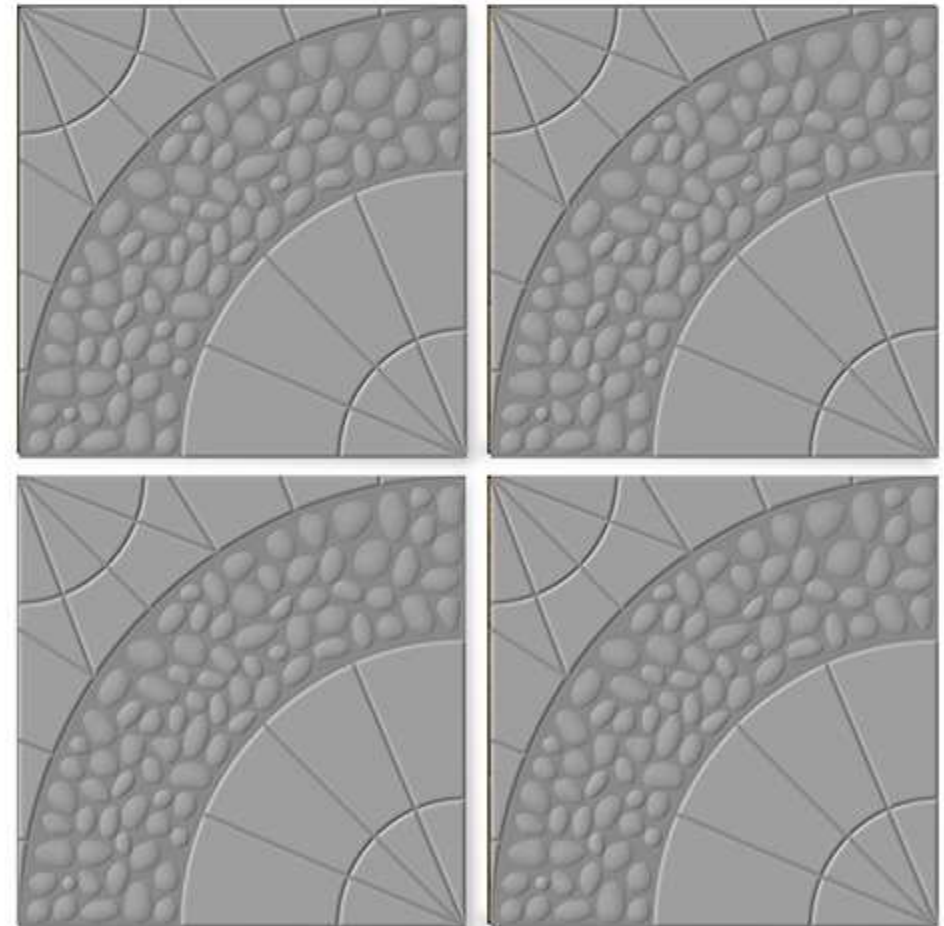


Applications



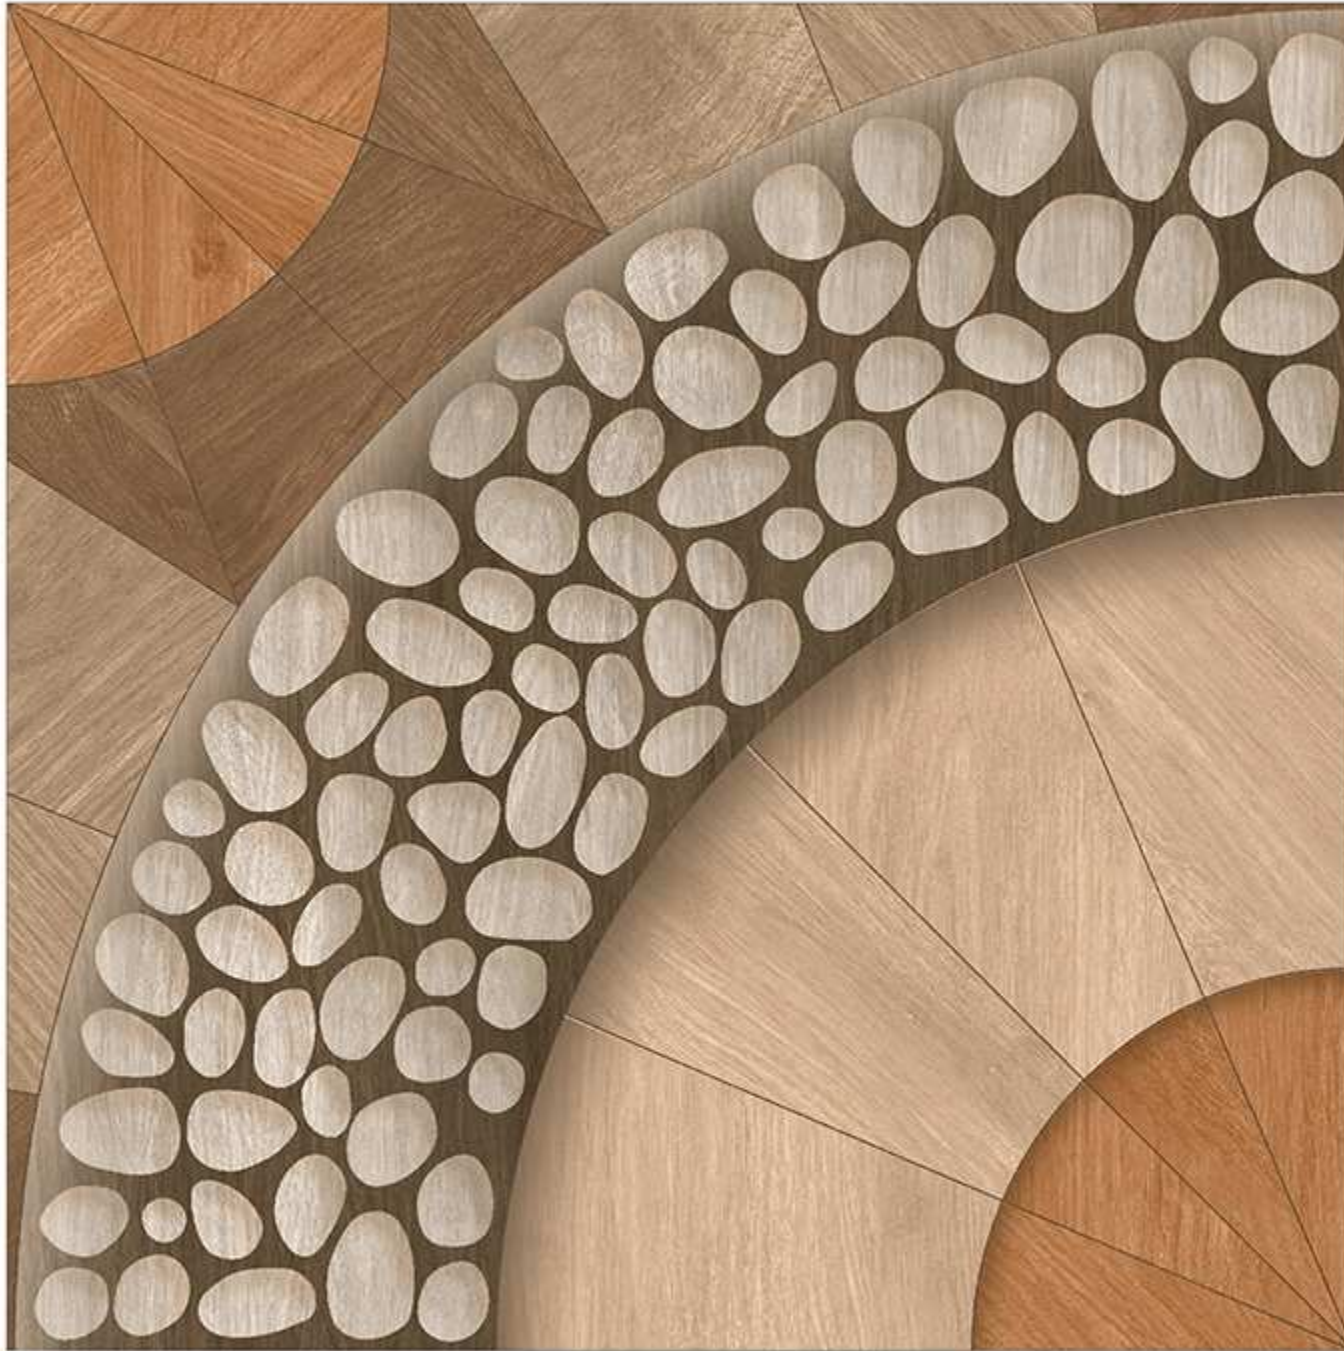

2401

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

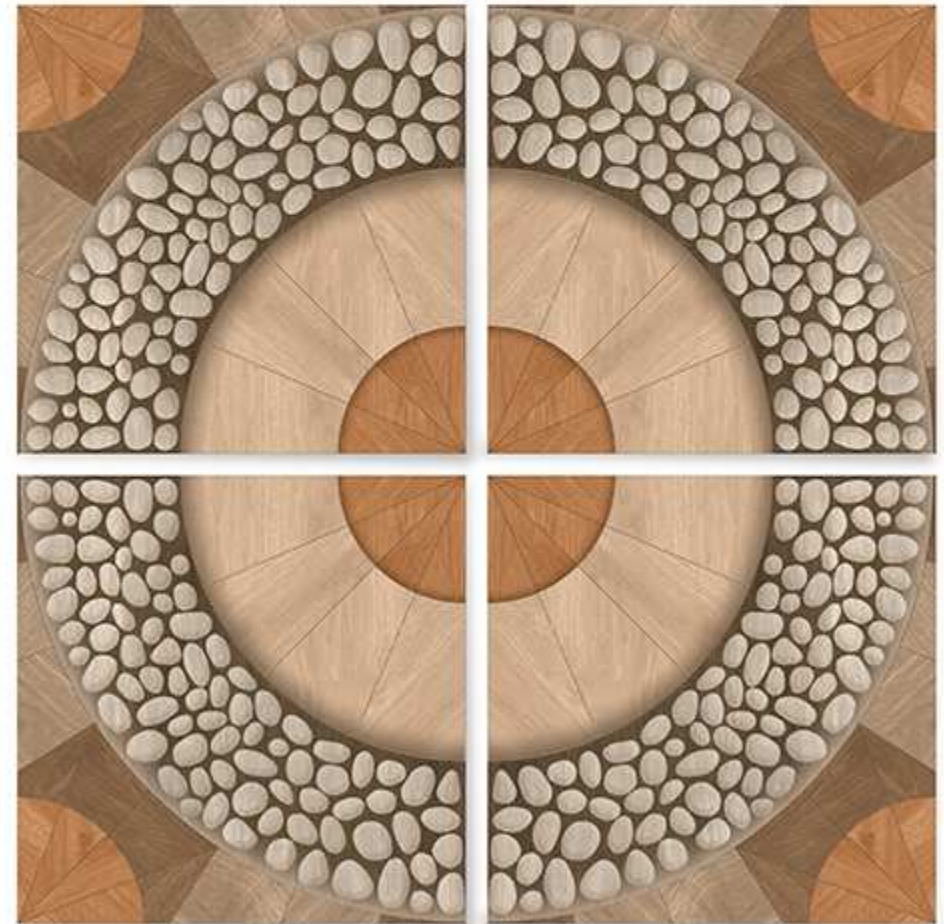

Applications








2402

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

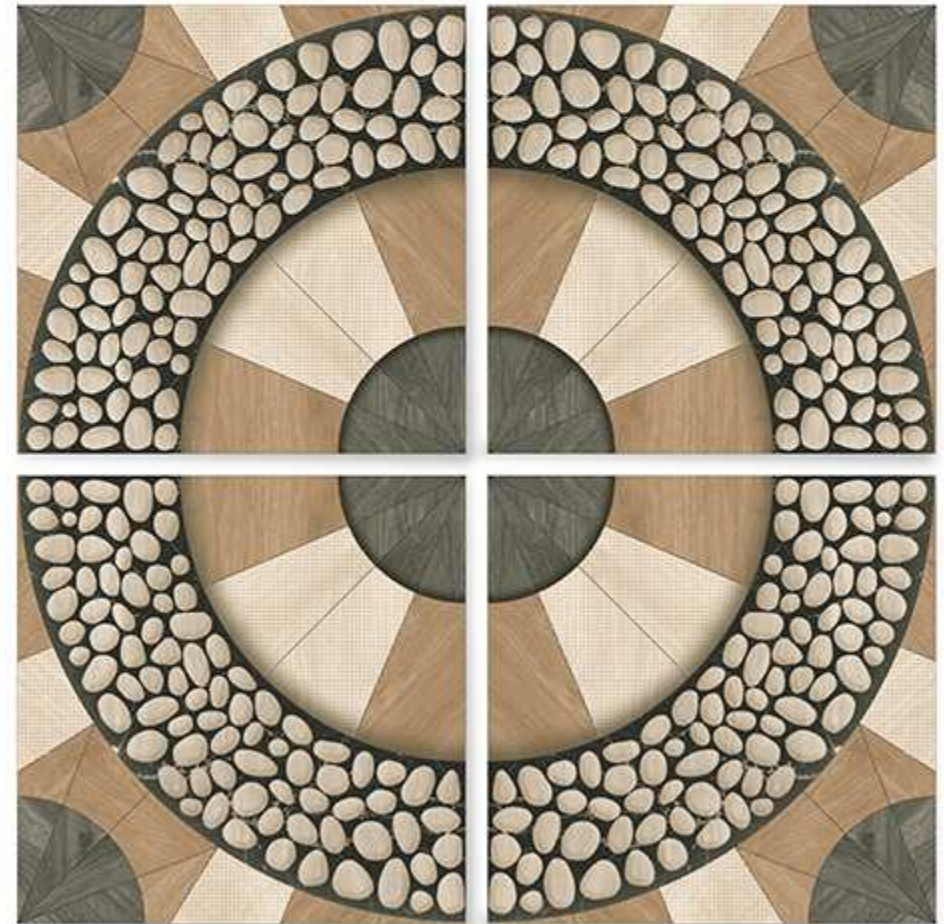

Applications



Residence



Commercial



Malls &
Restaurants




Public
Area





2403

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

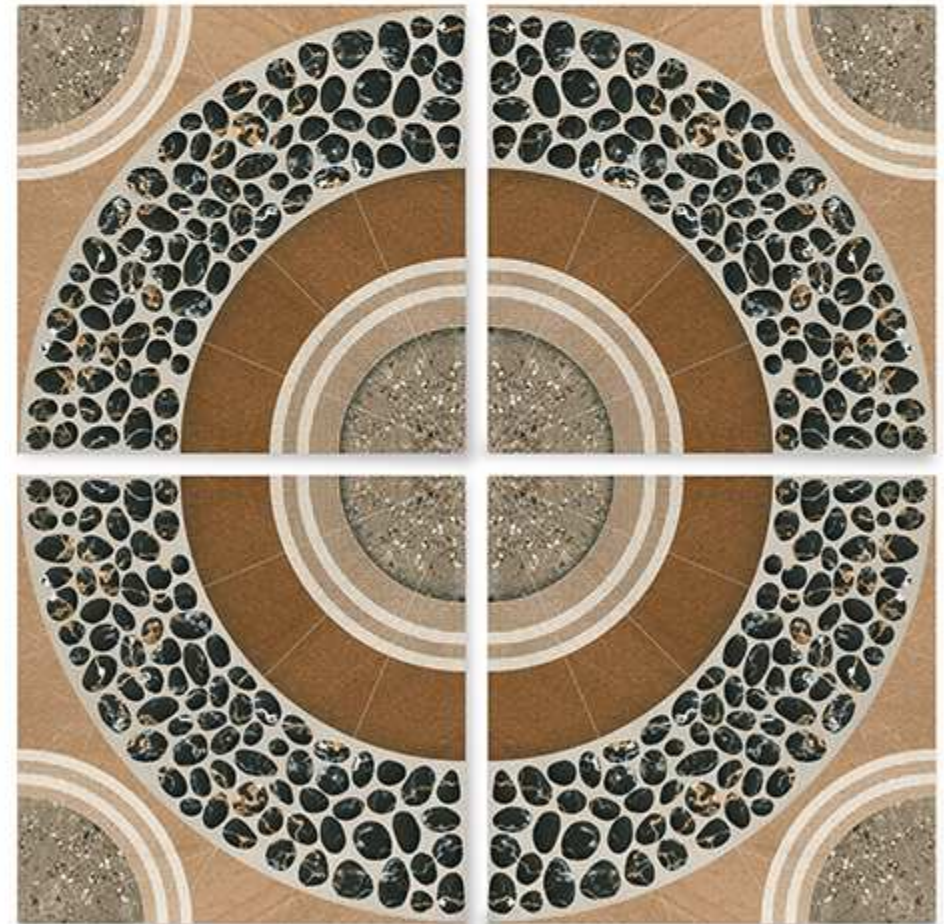

Applications








2404


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

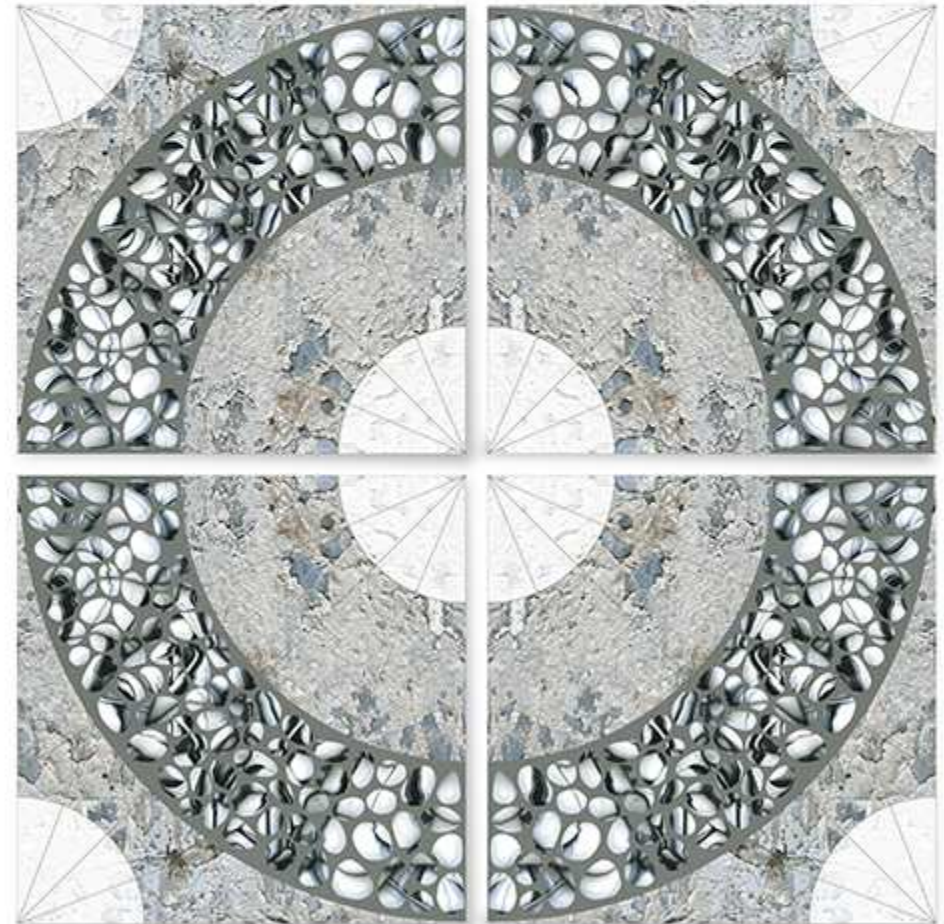

Applications






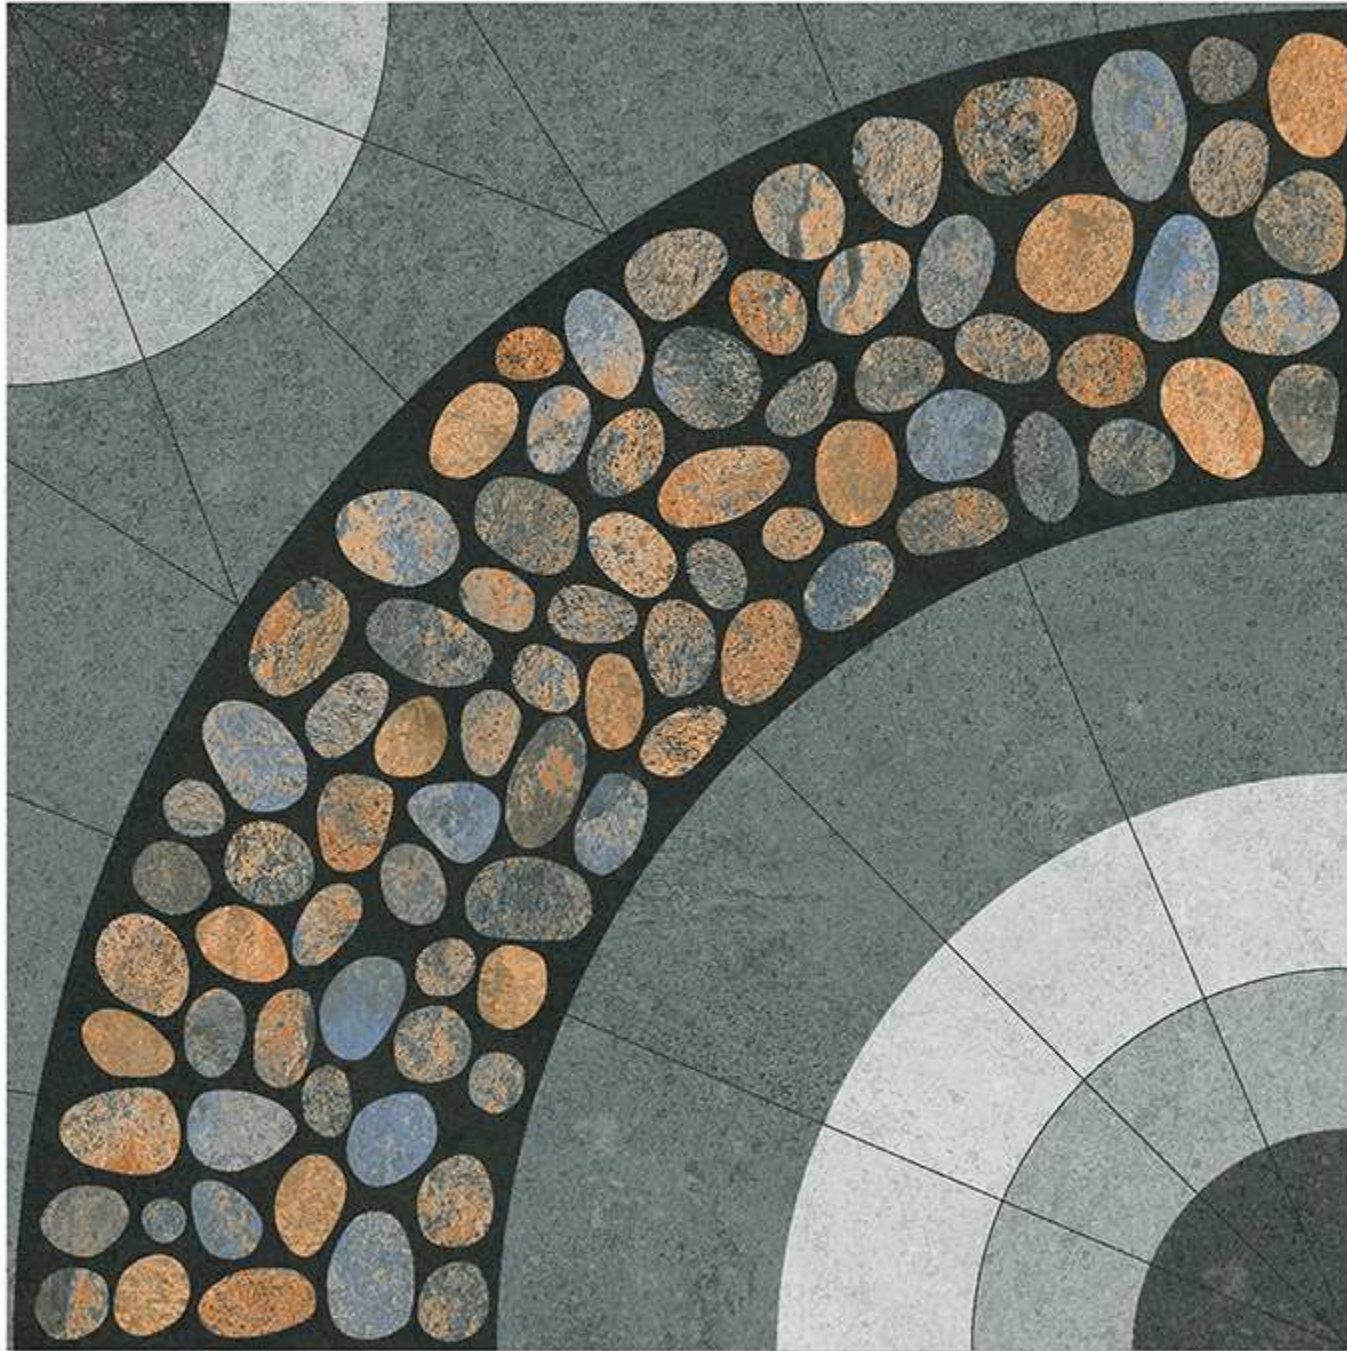

2405


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

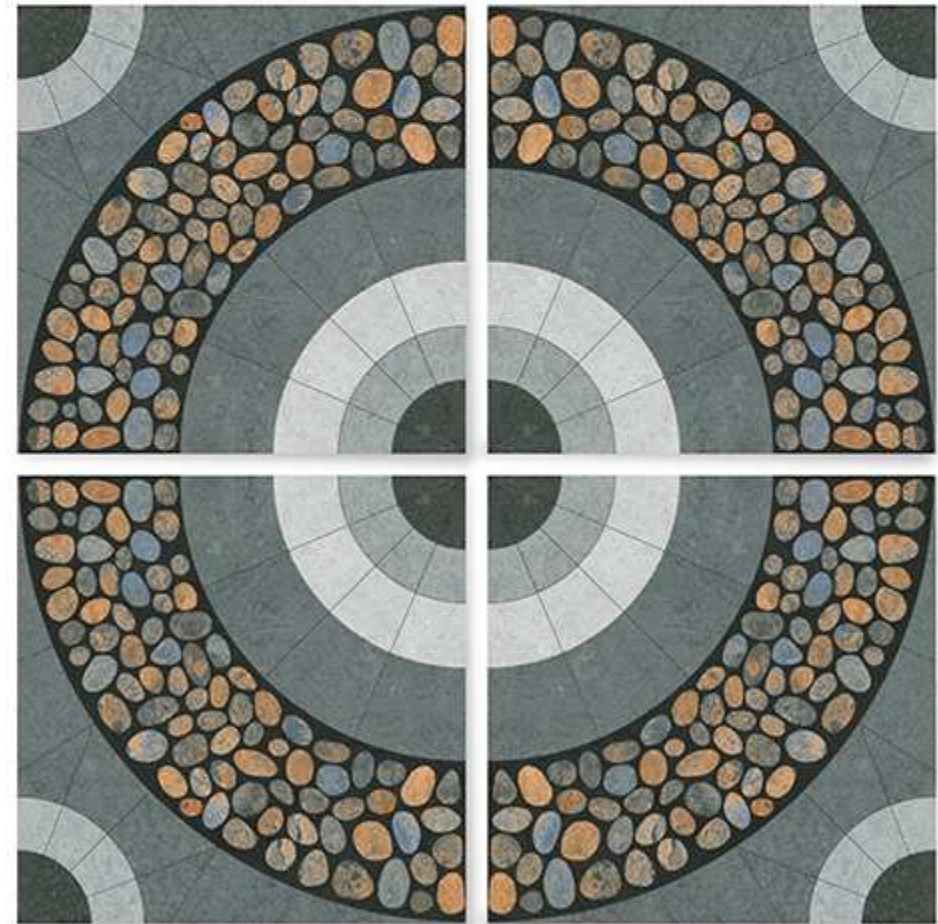

Applications






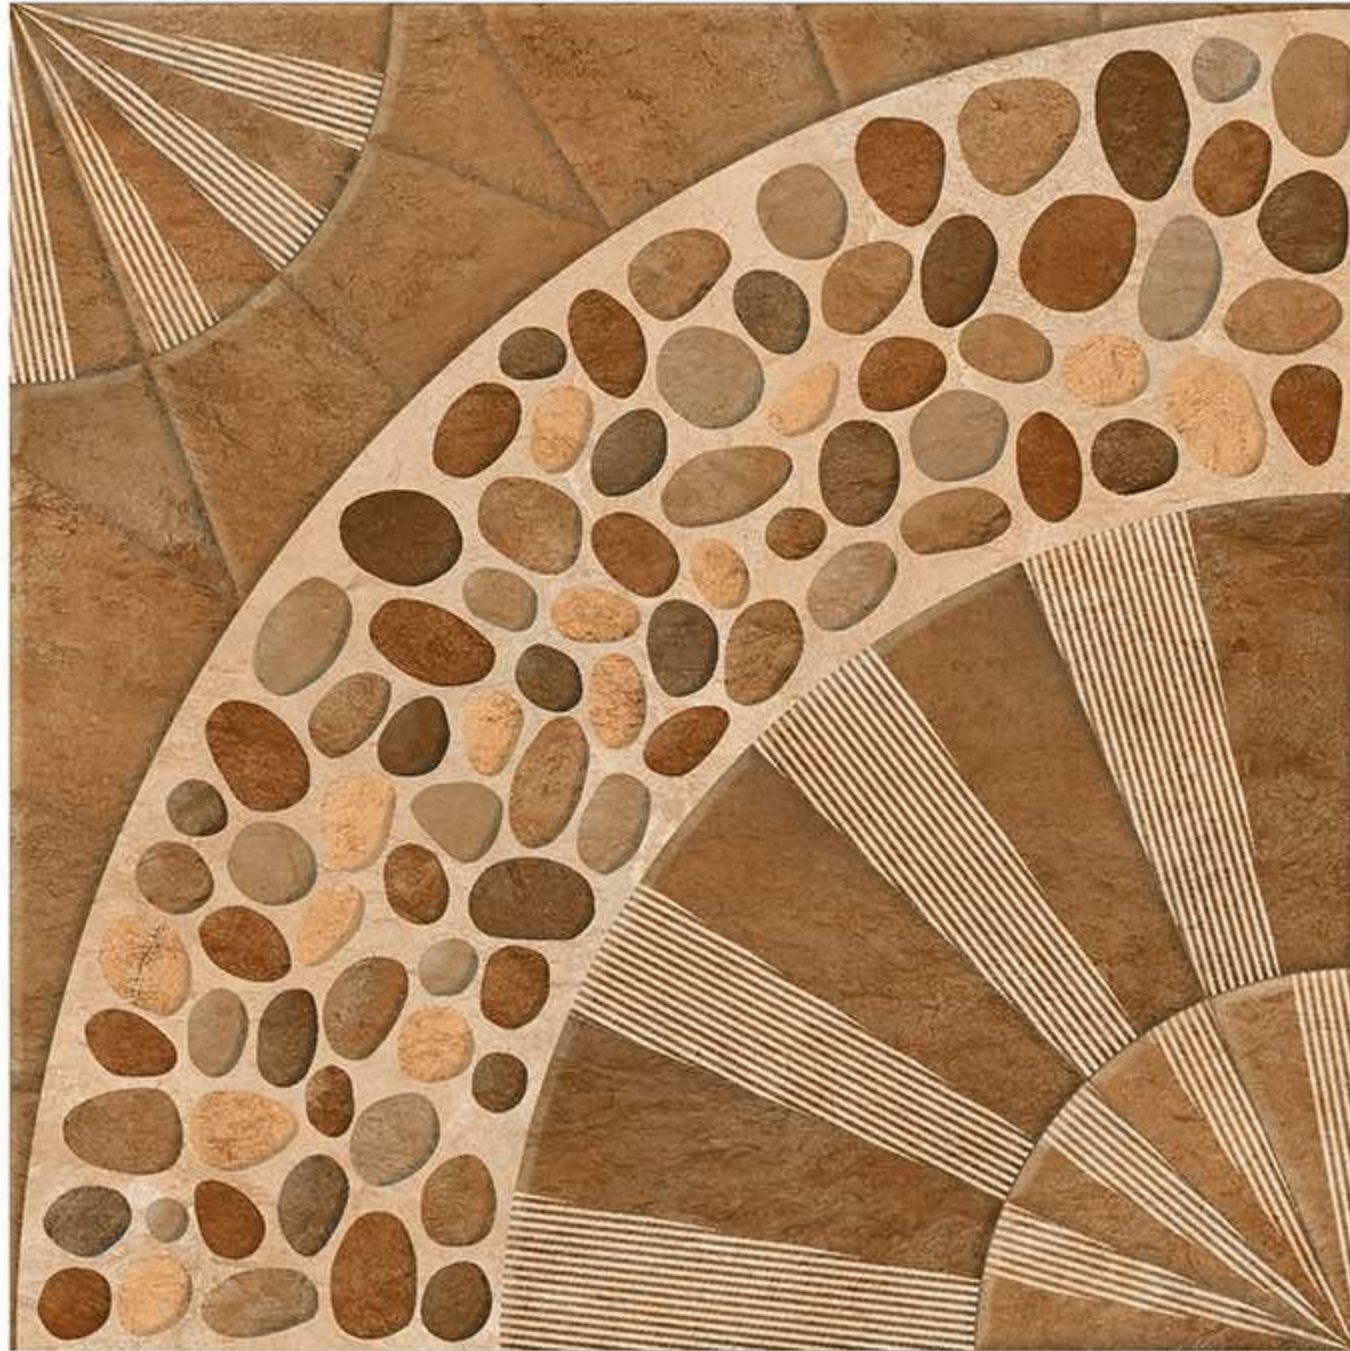

2406


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

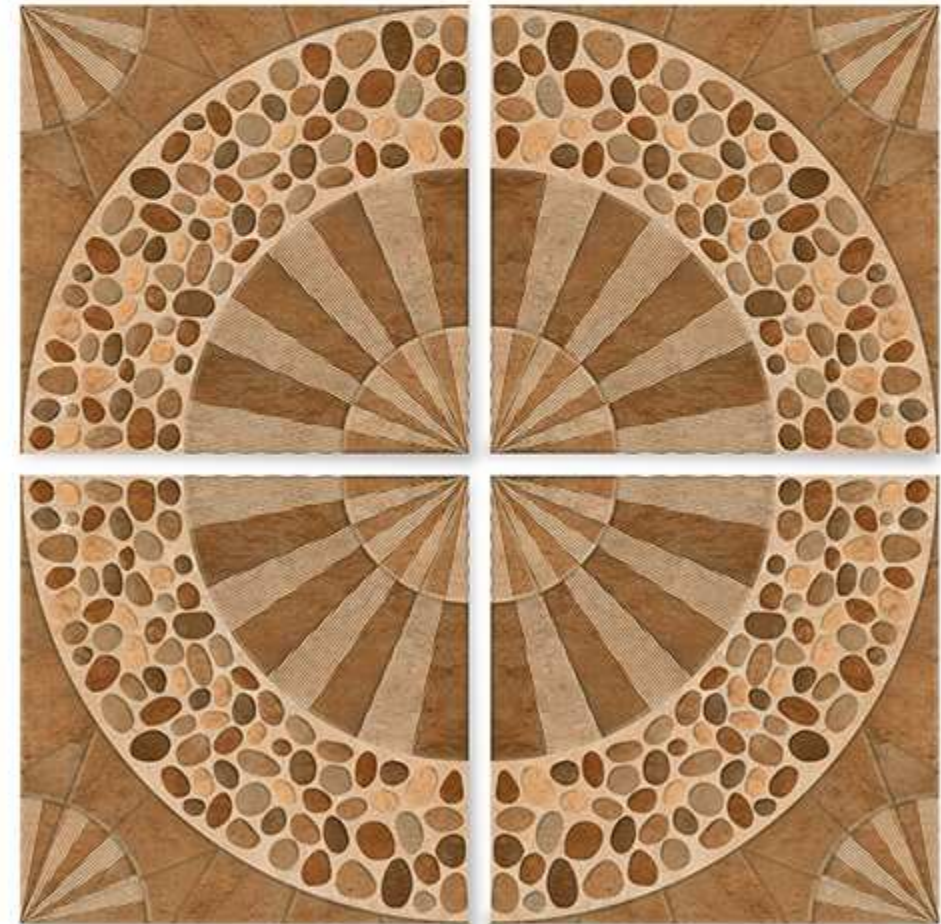

Applications






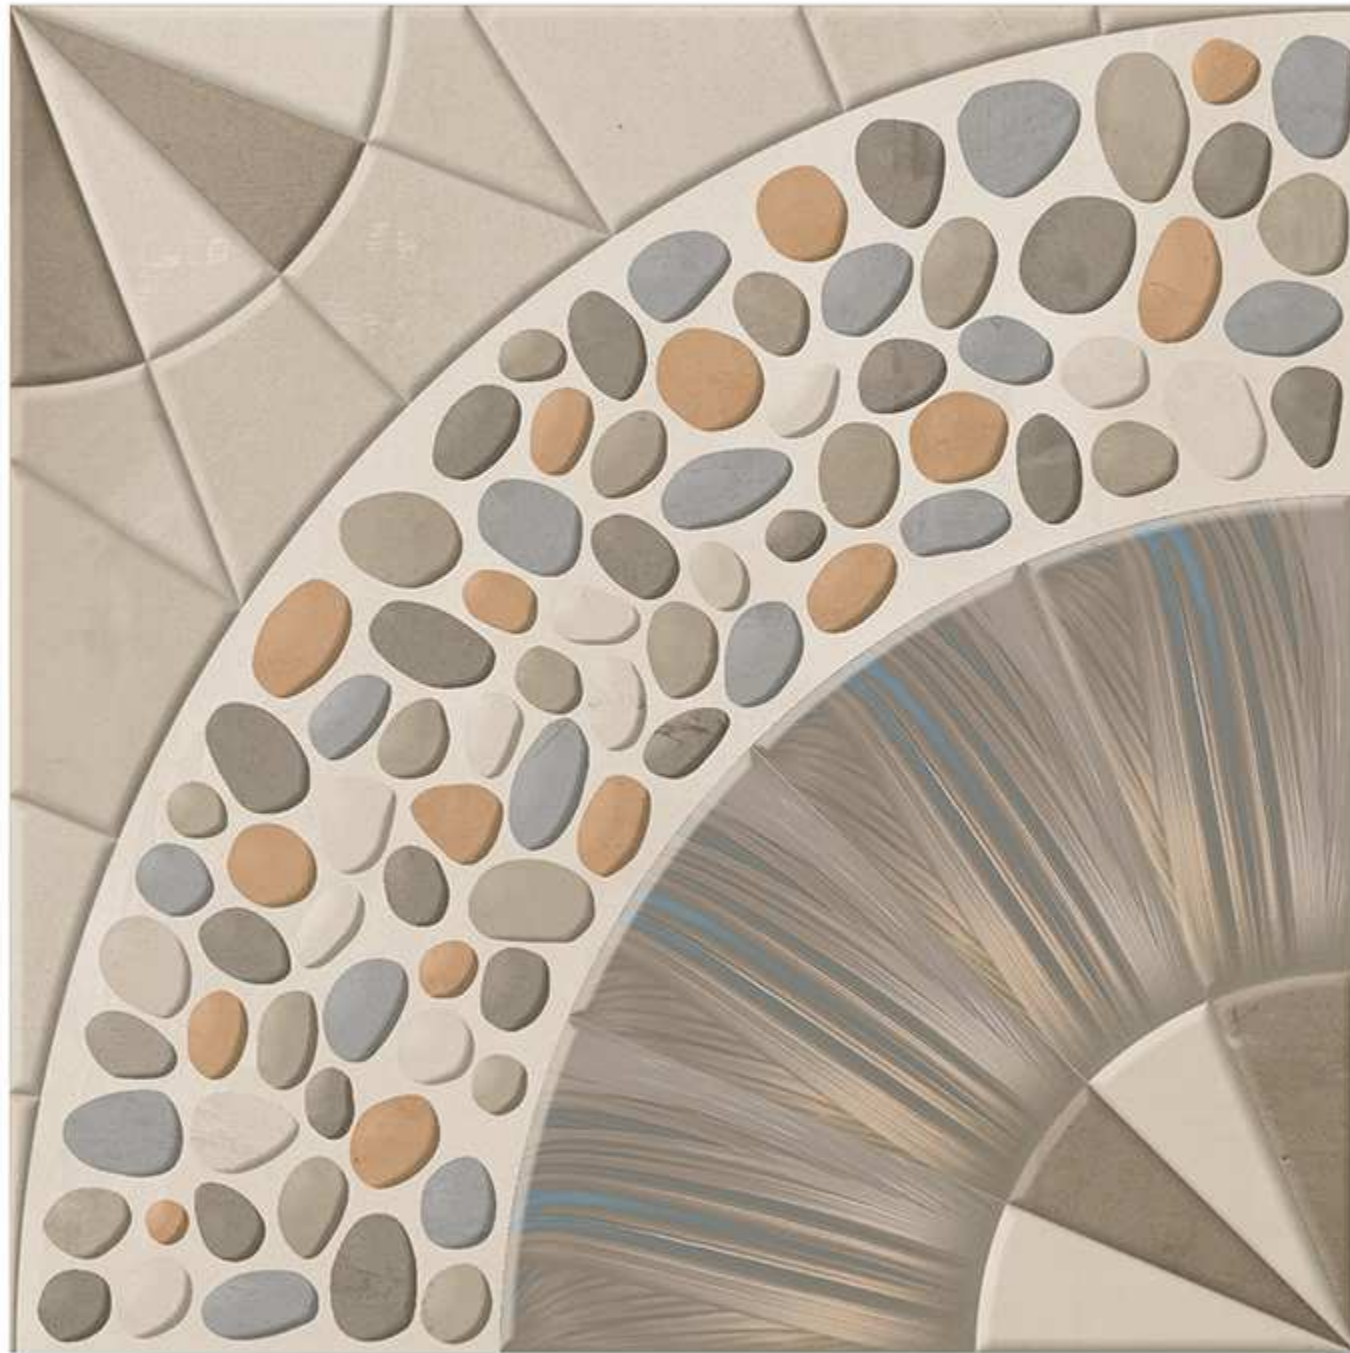

2407

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

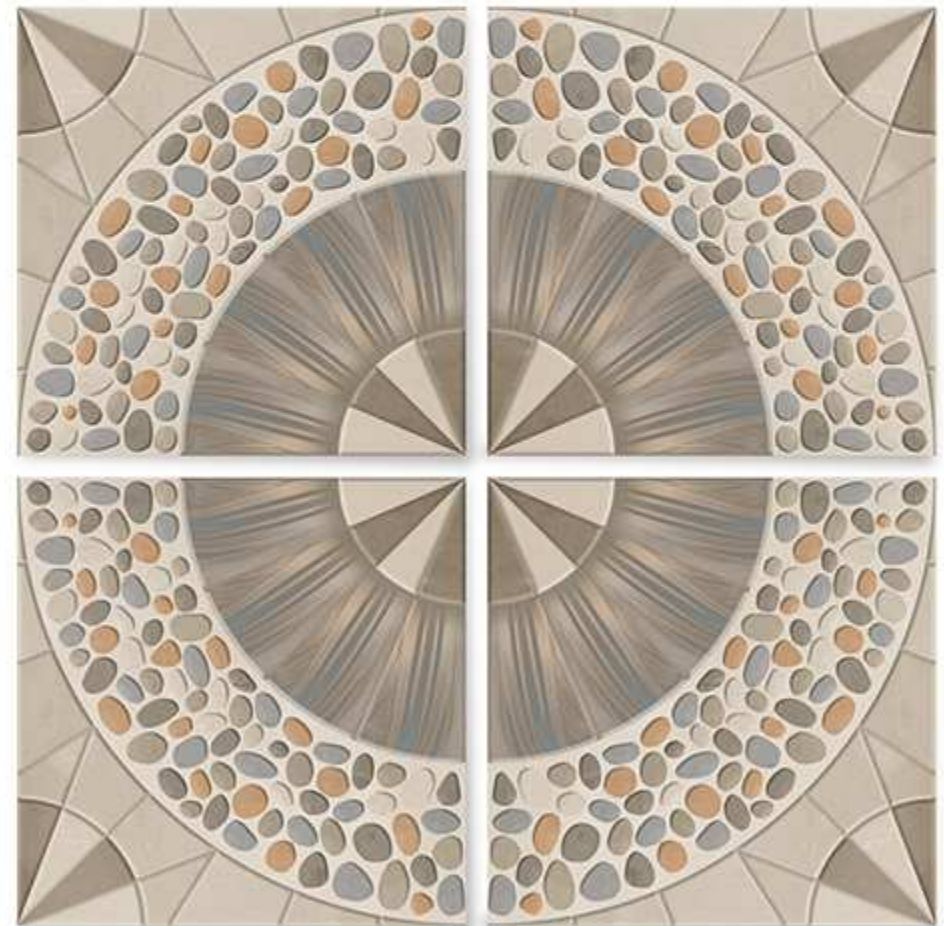

Applications








2408


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

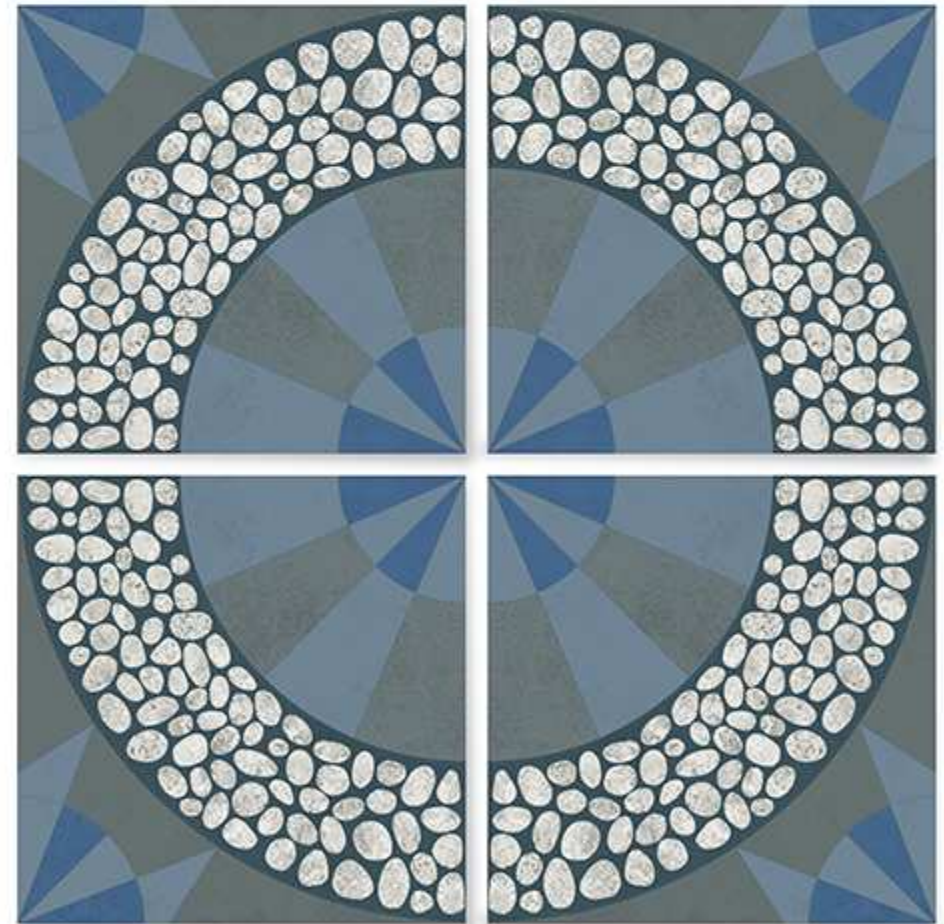

Applications






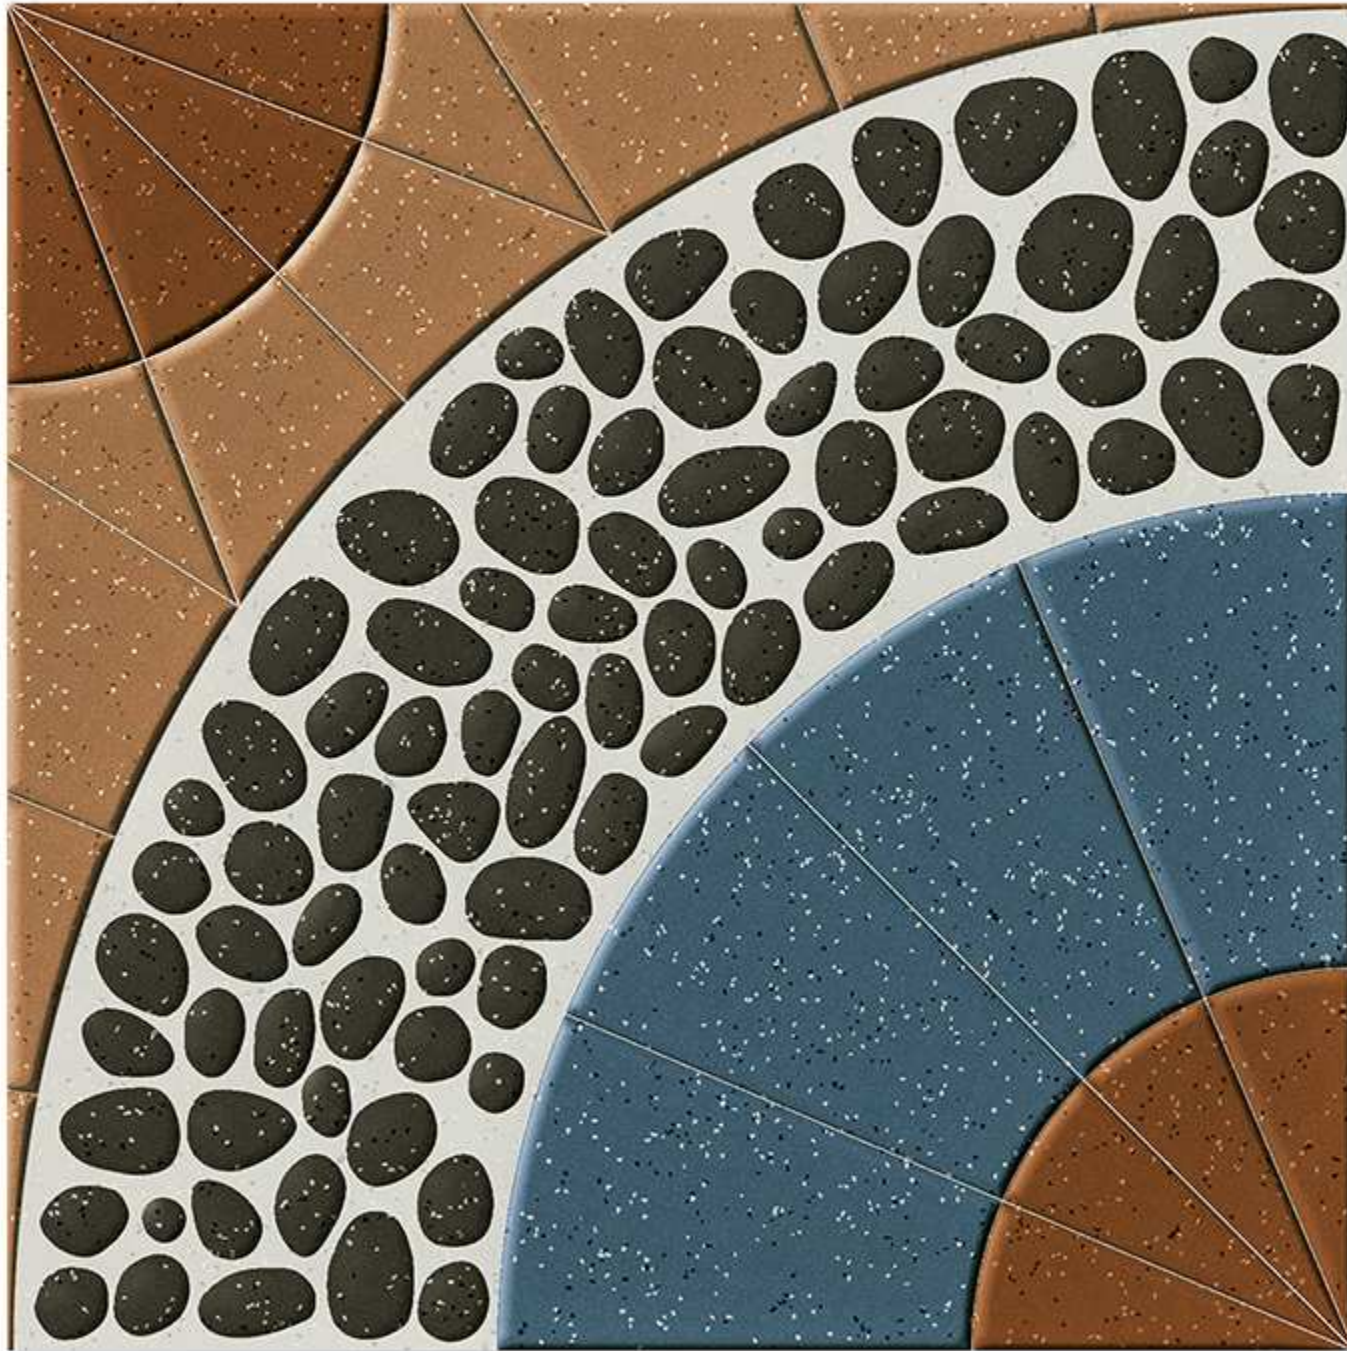

2410

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

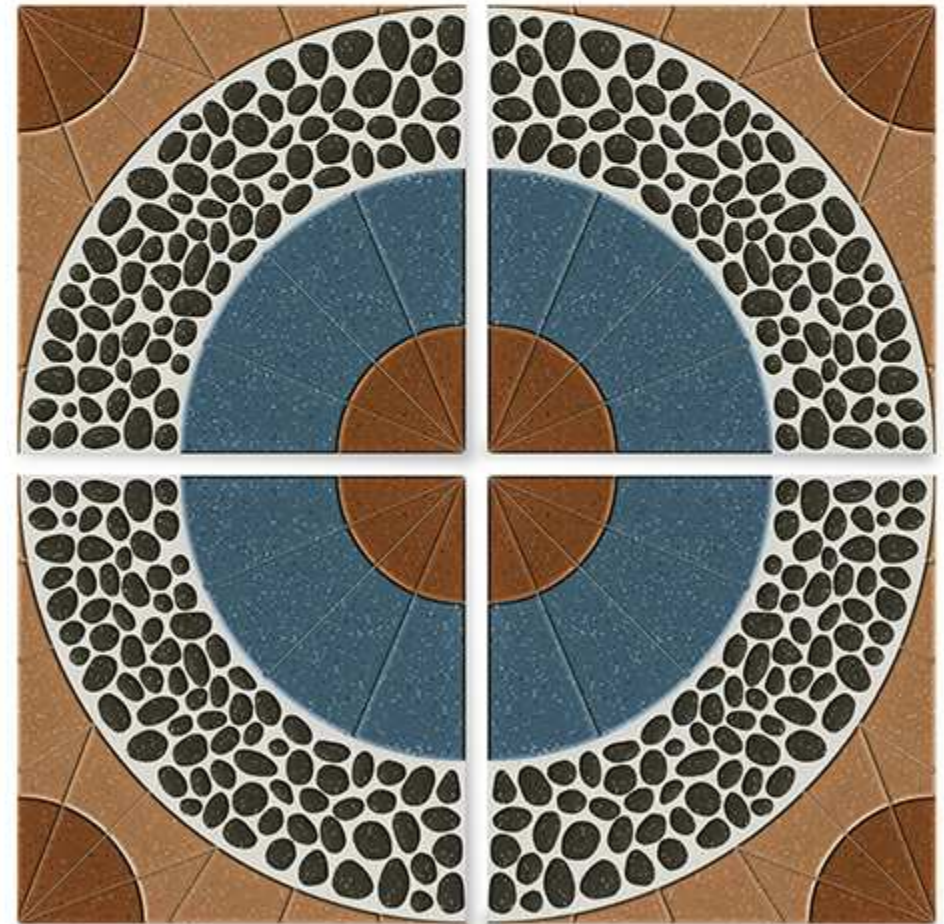

Applications








2411

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

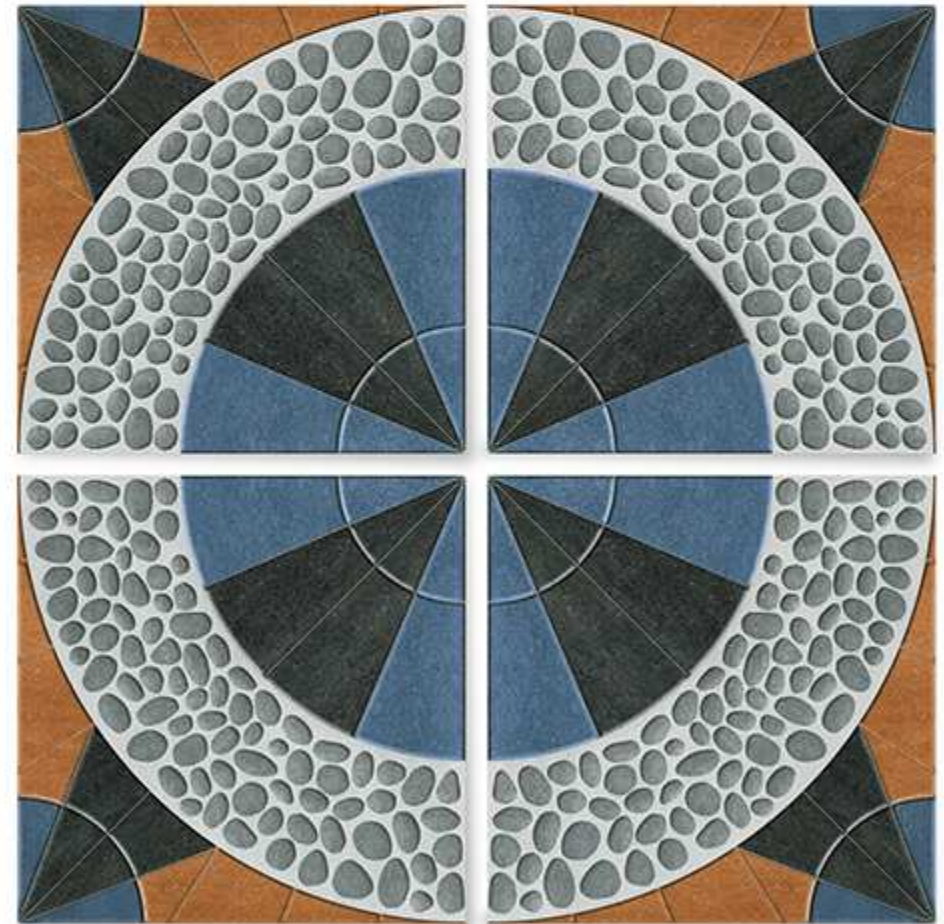

Applications








2412

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

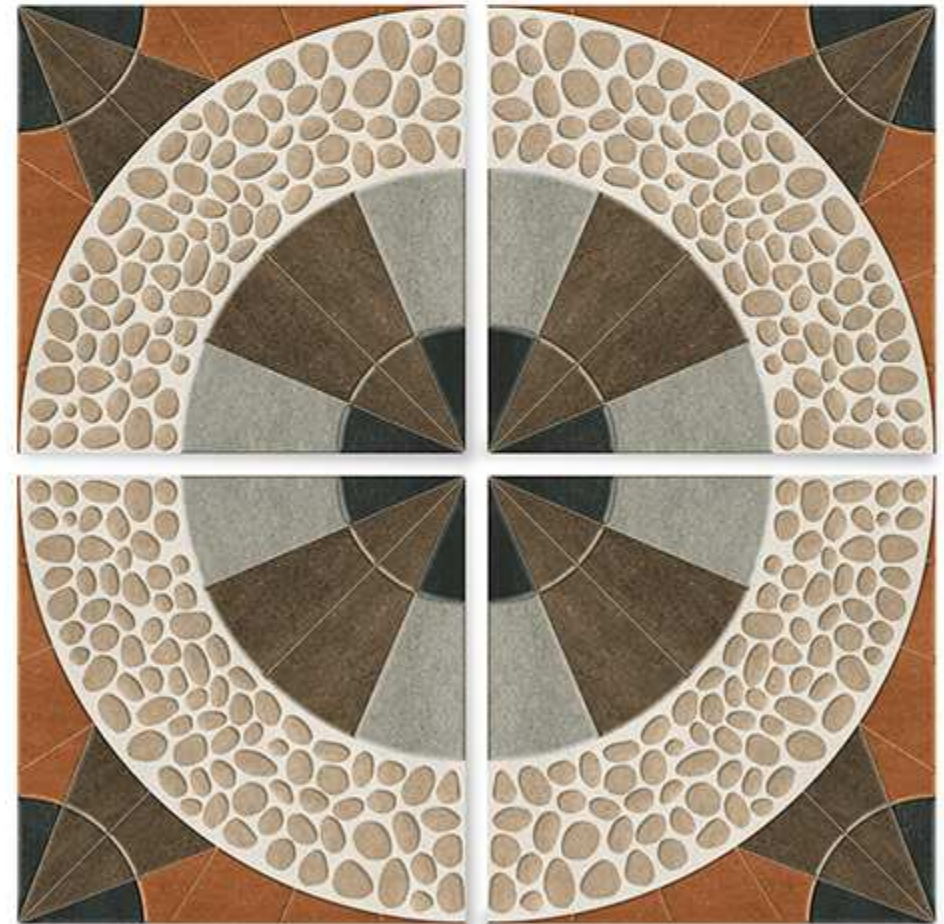

Applications








2413


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

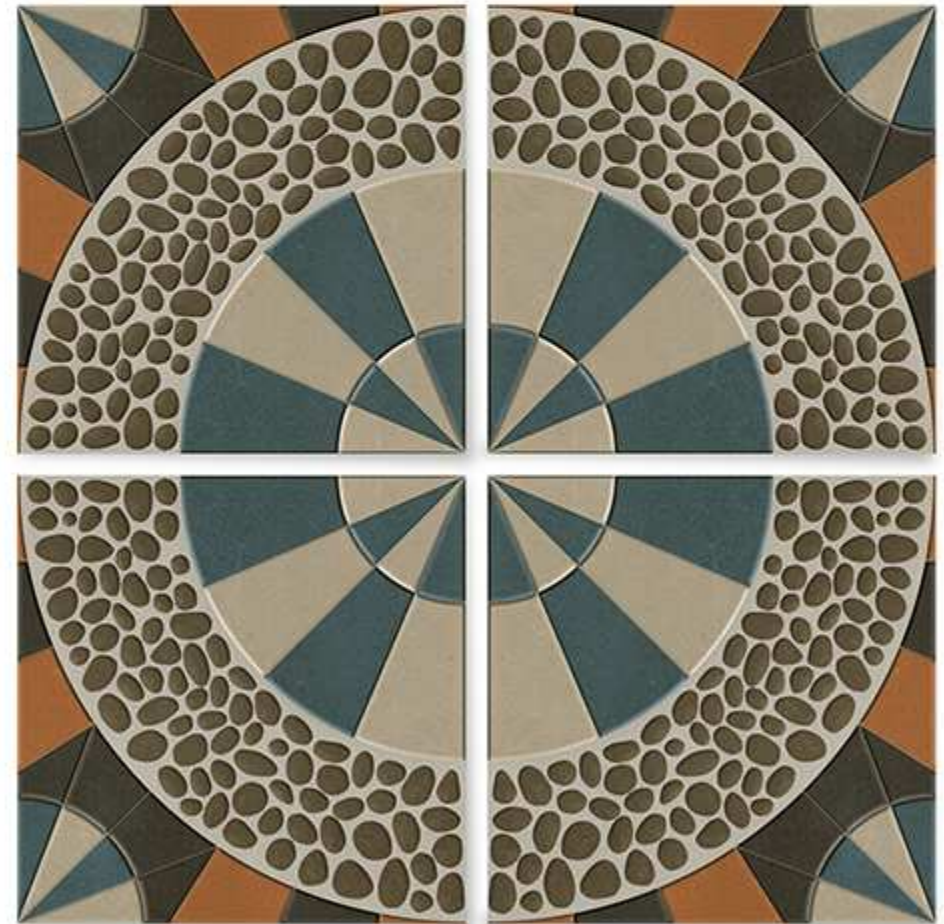

Applications






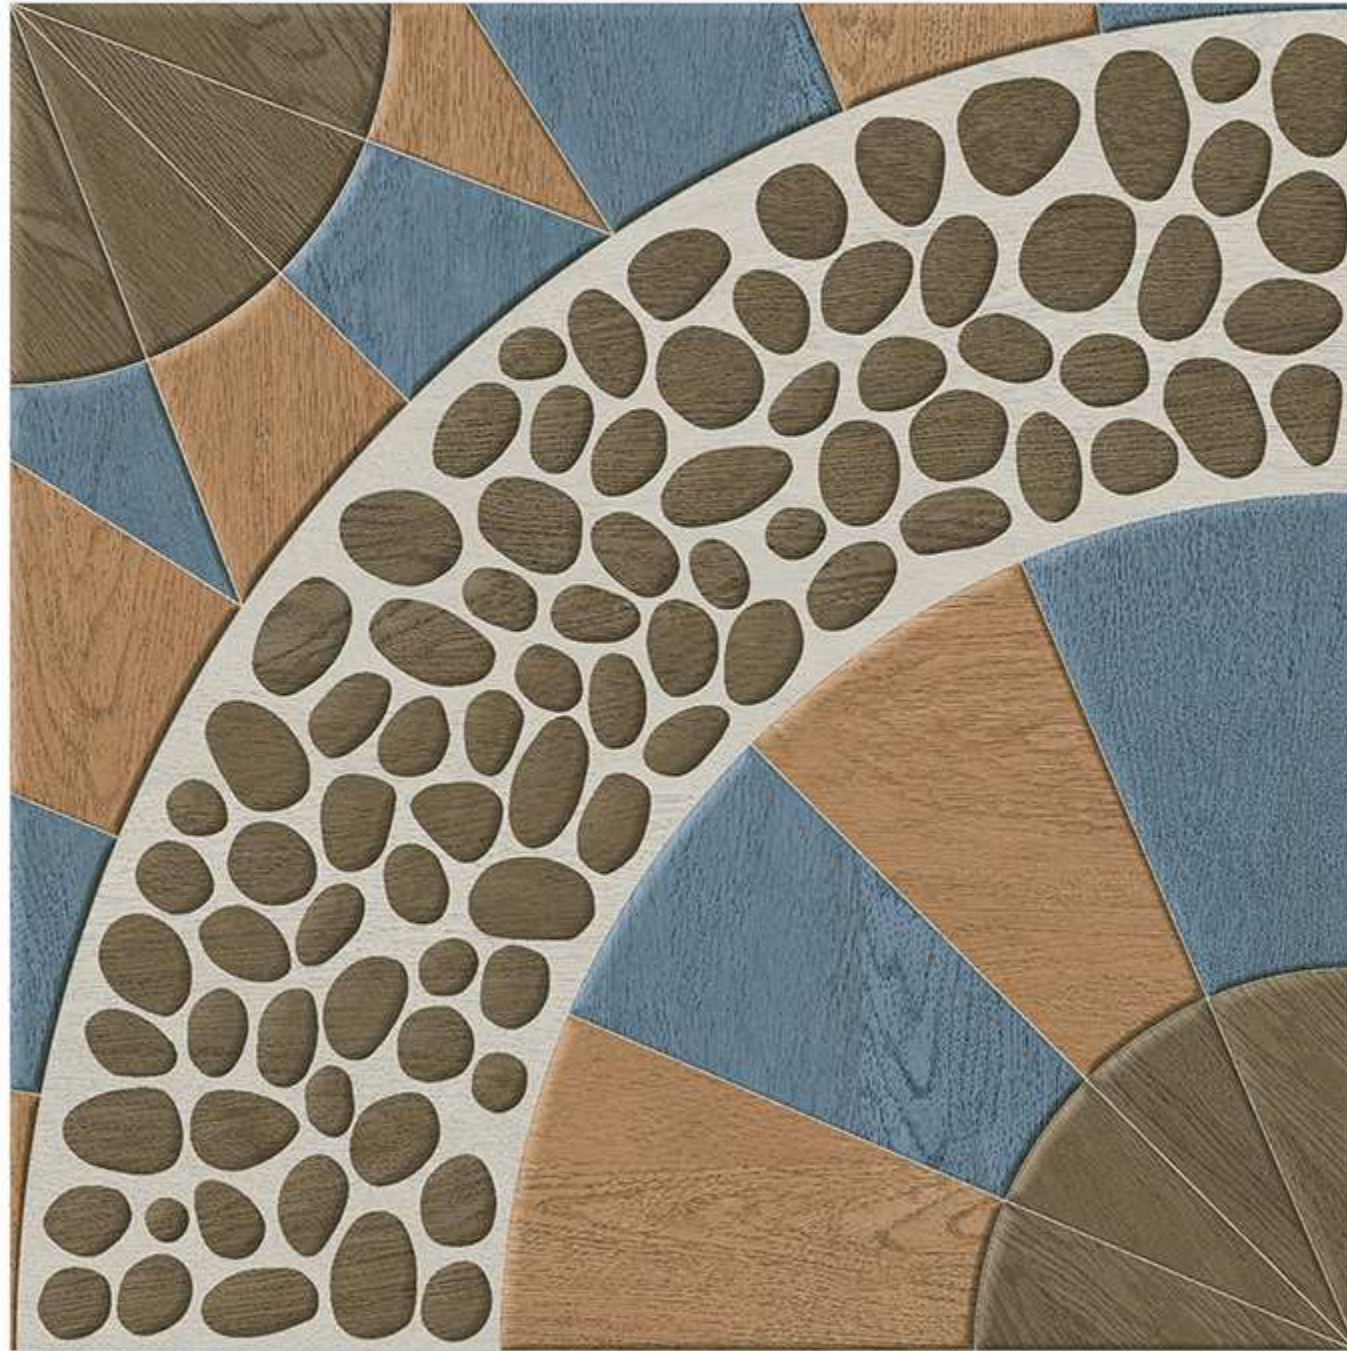

2414 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

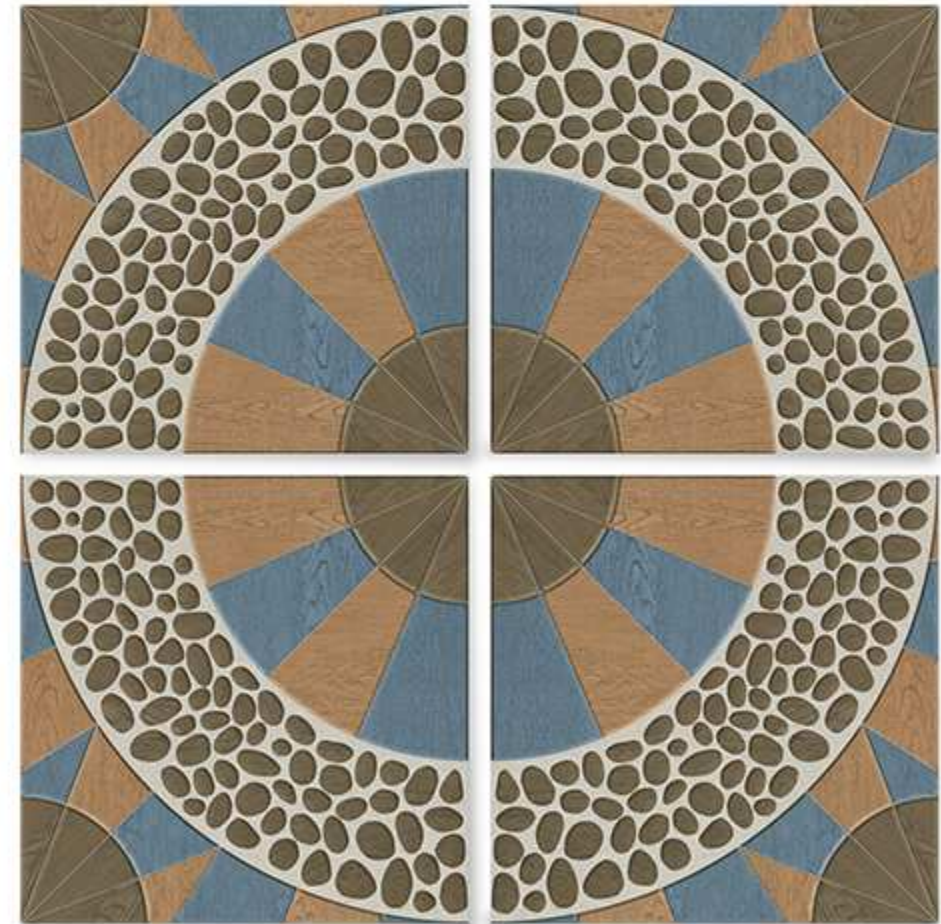

Applications








2415 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

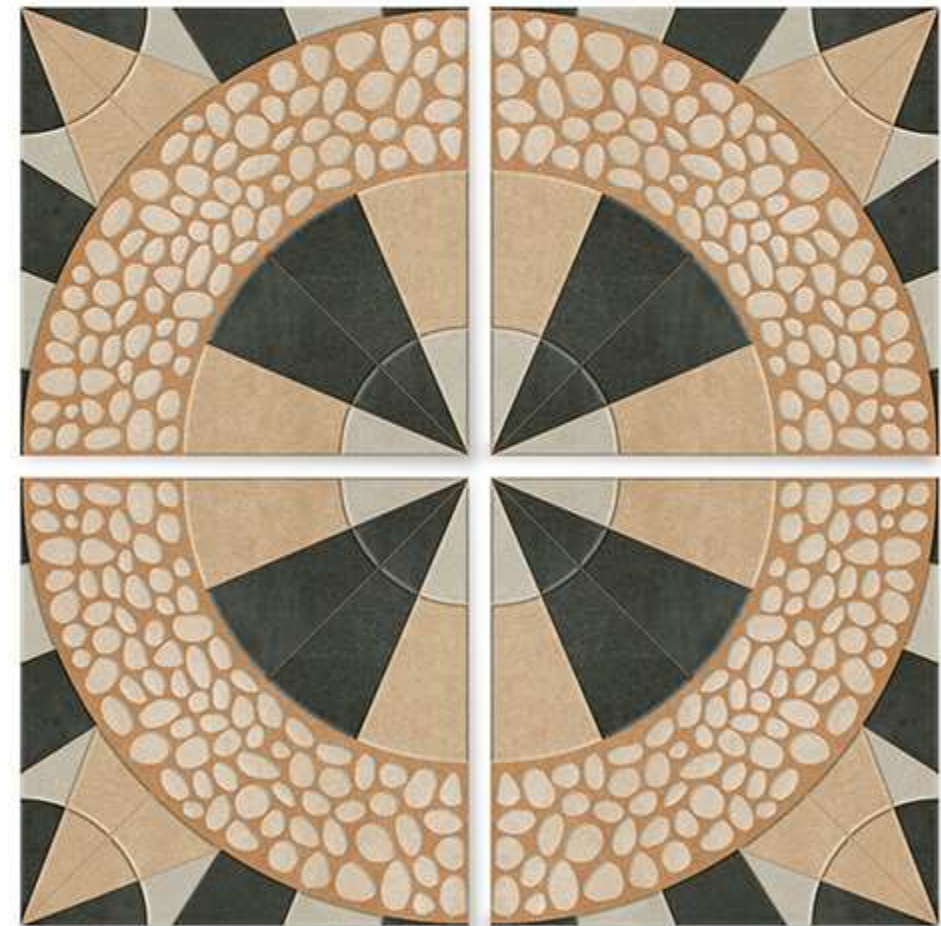

Applications



Residence



Commercial




Malls &
Restaurants







Public
Area



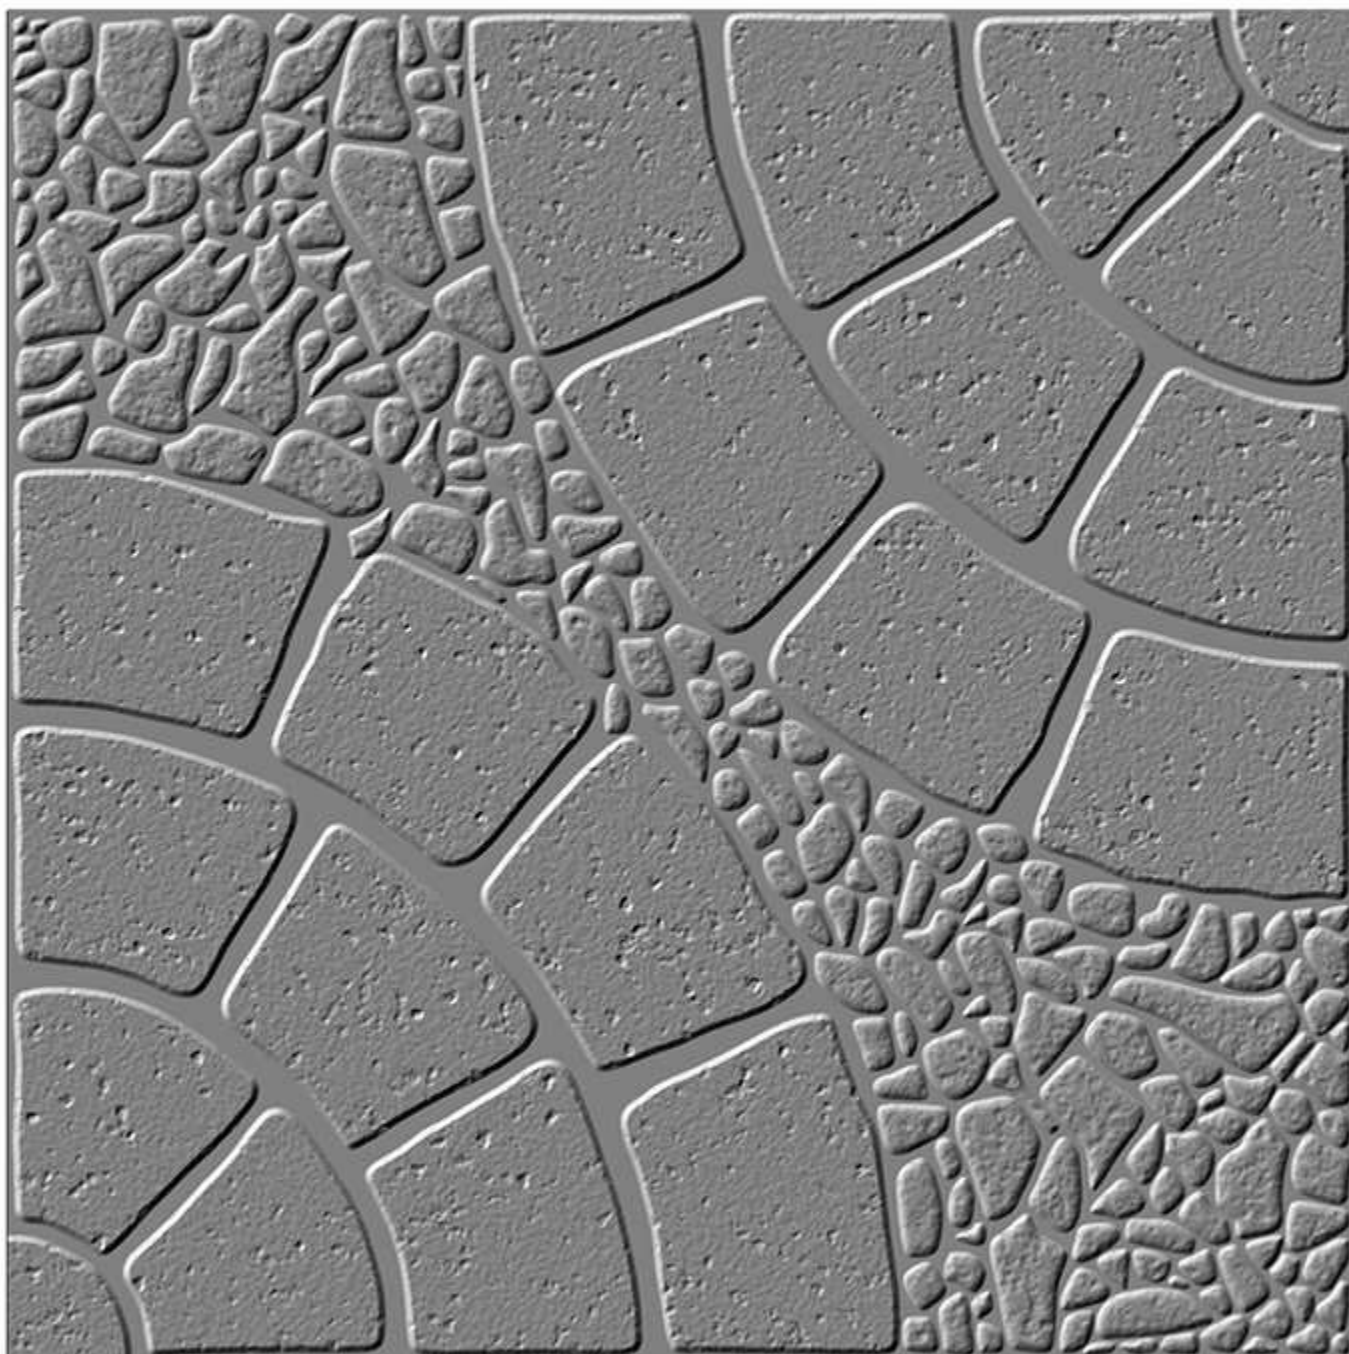

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

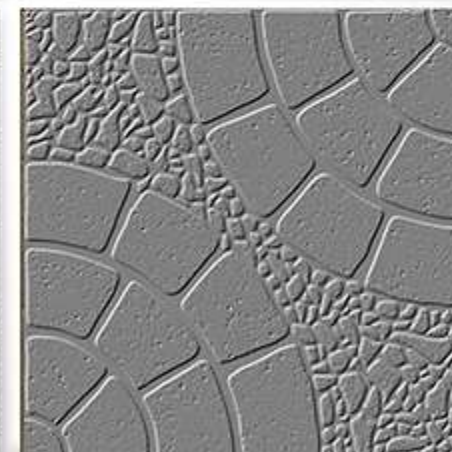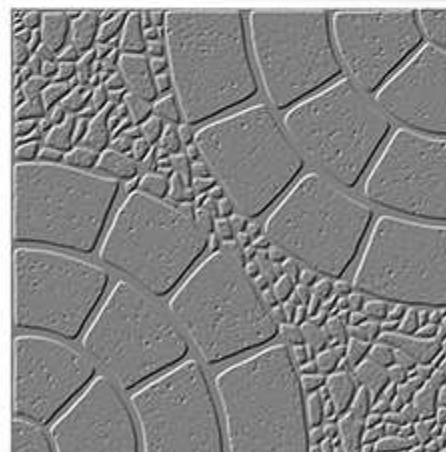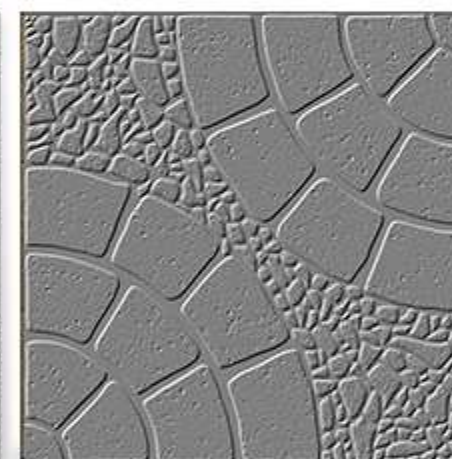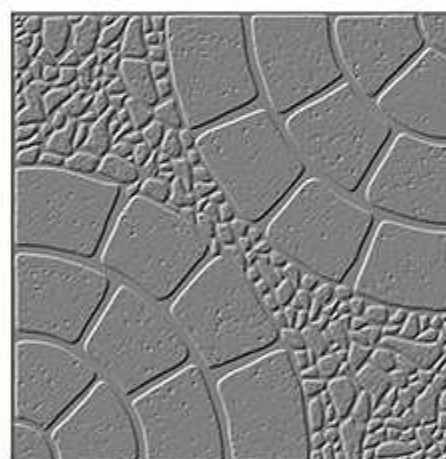

Applications



Residence



Commercial



Pubs &
Restaurants




Public
Area



2501

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

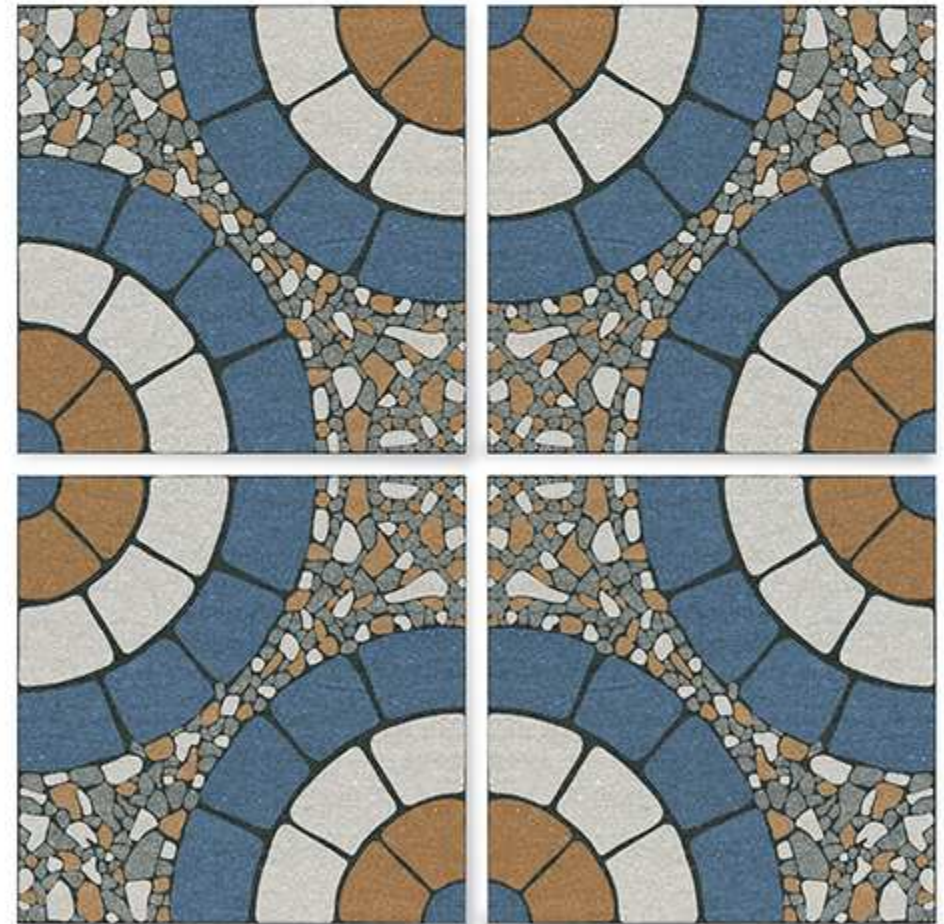


Applications





2502

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

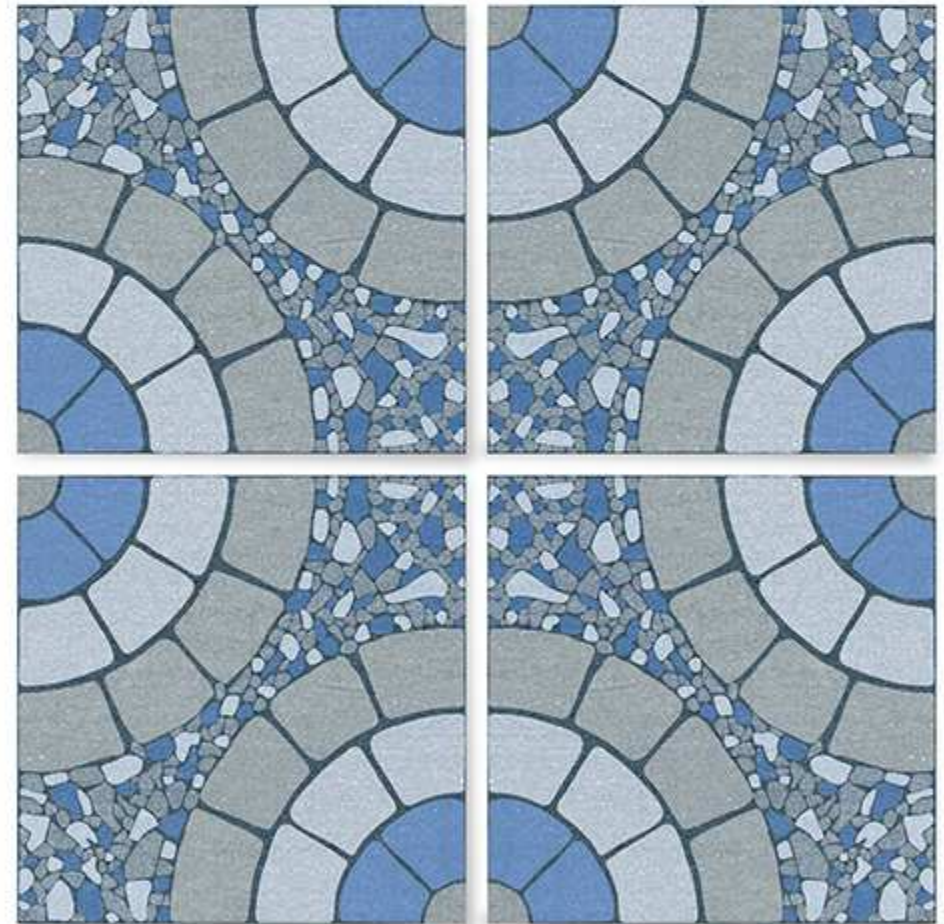


Applications





2503

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

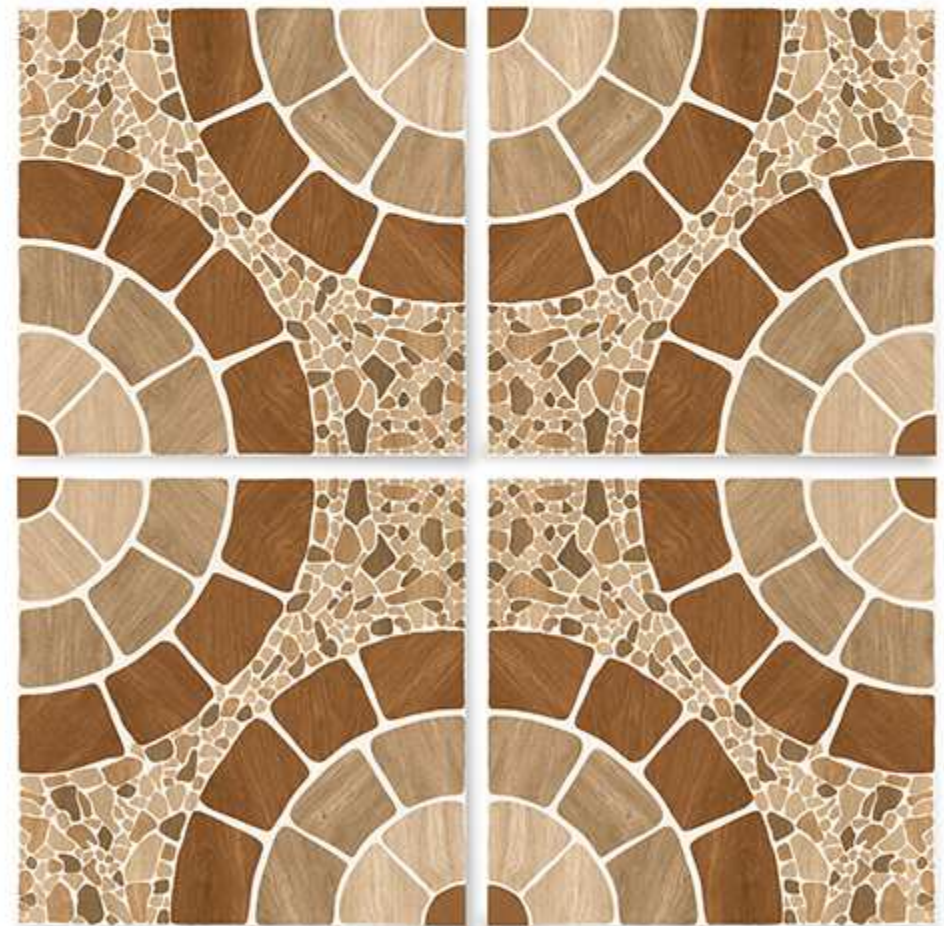


Applications





2504


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

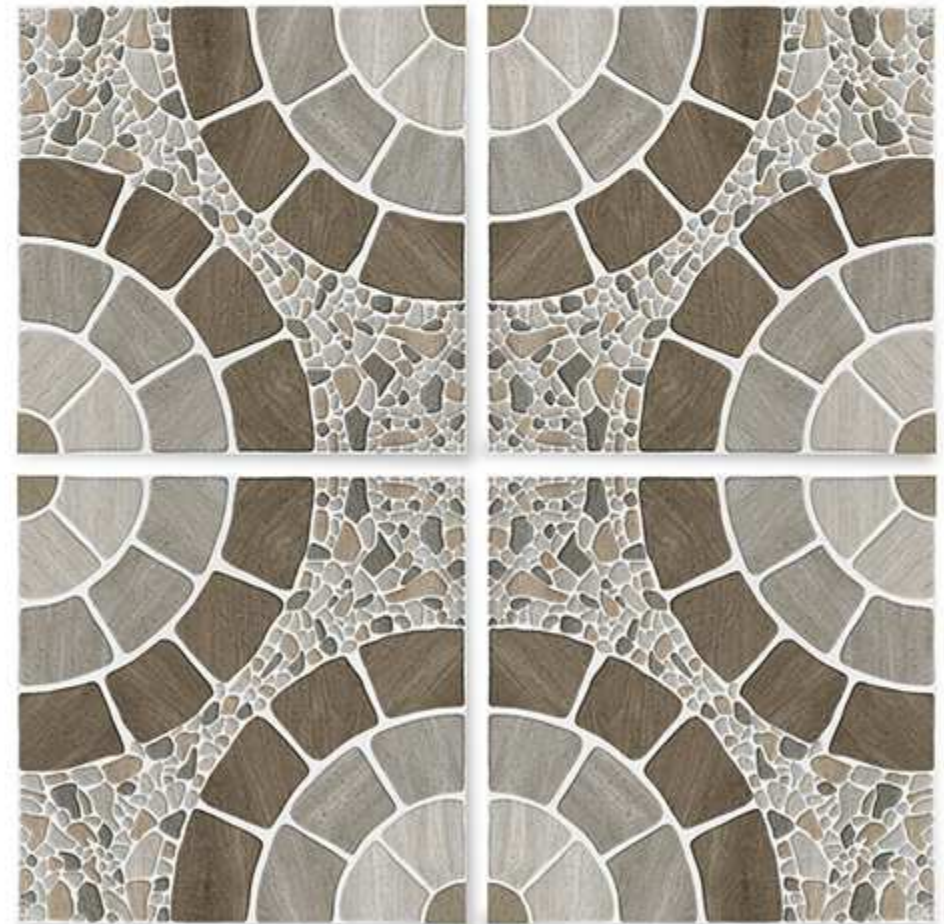

Applications






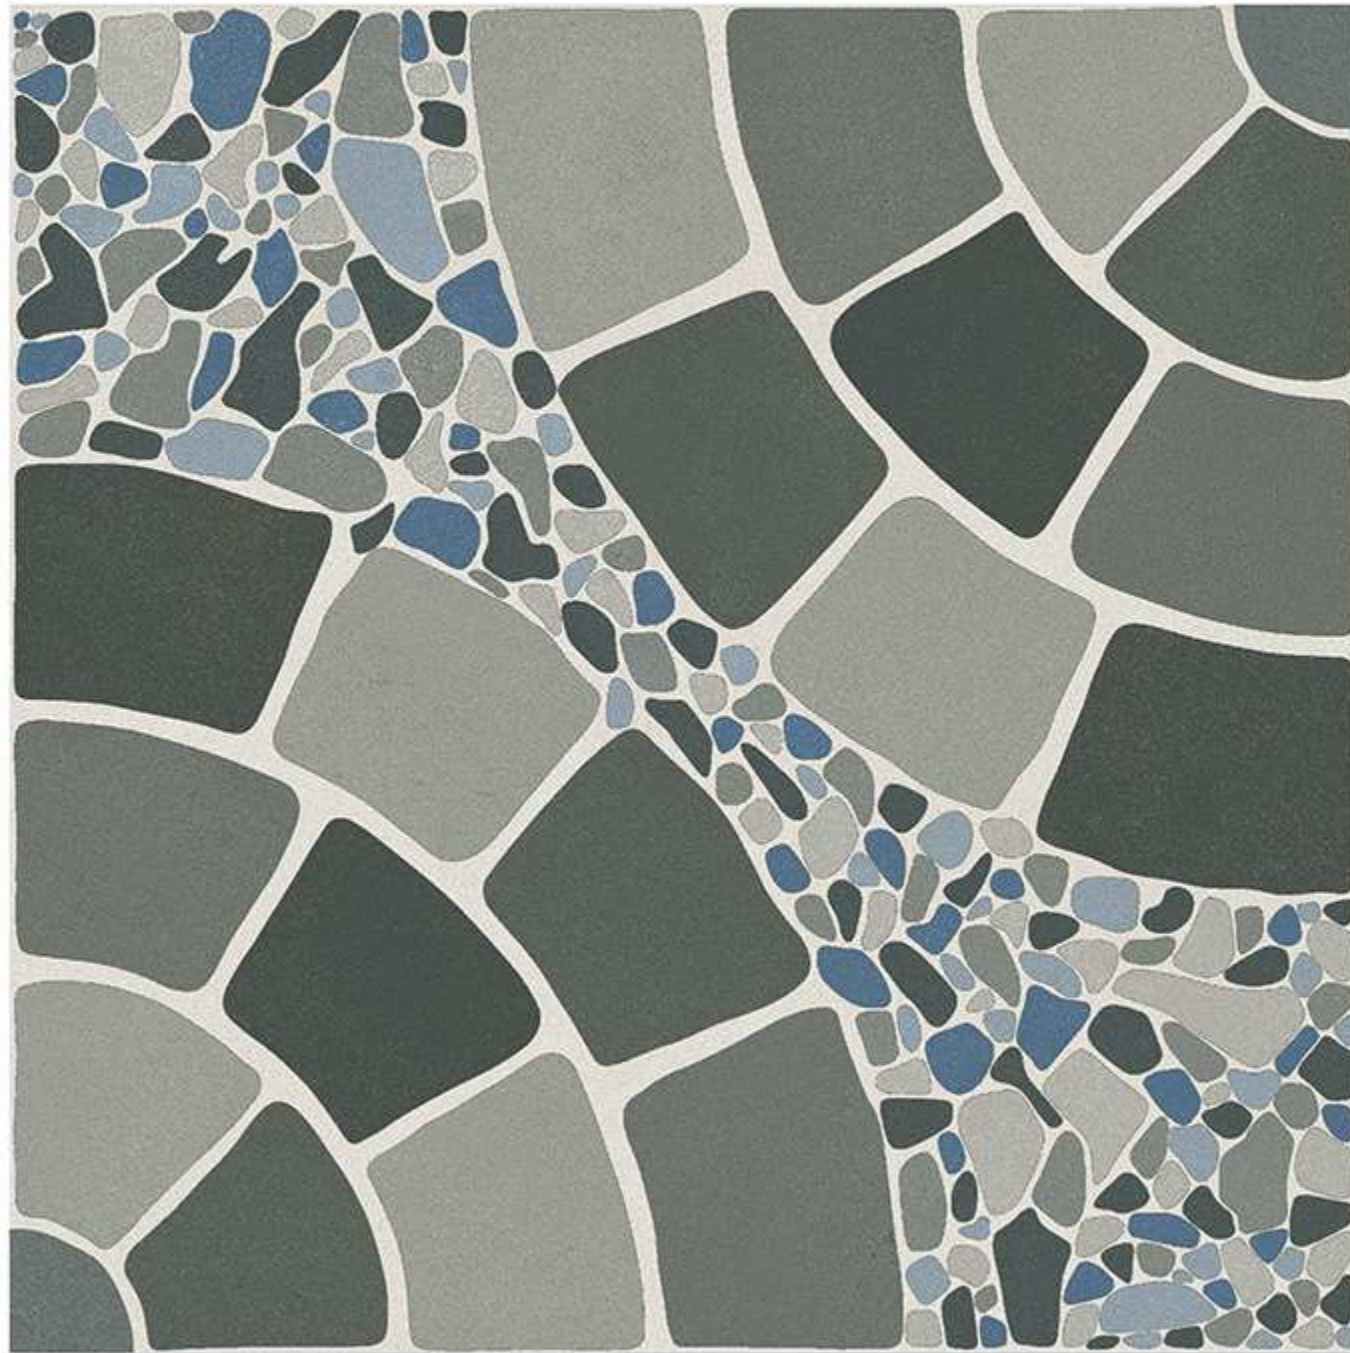

2506


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

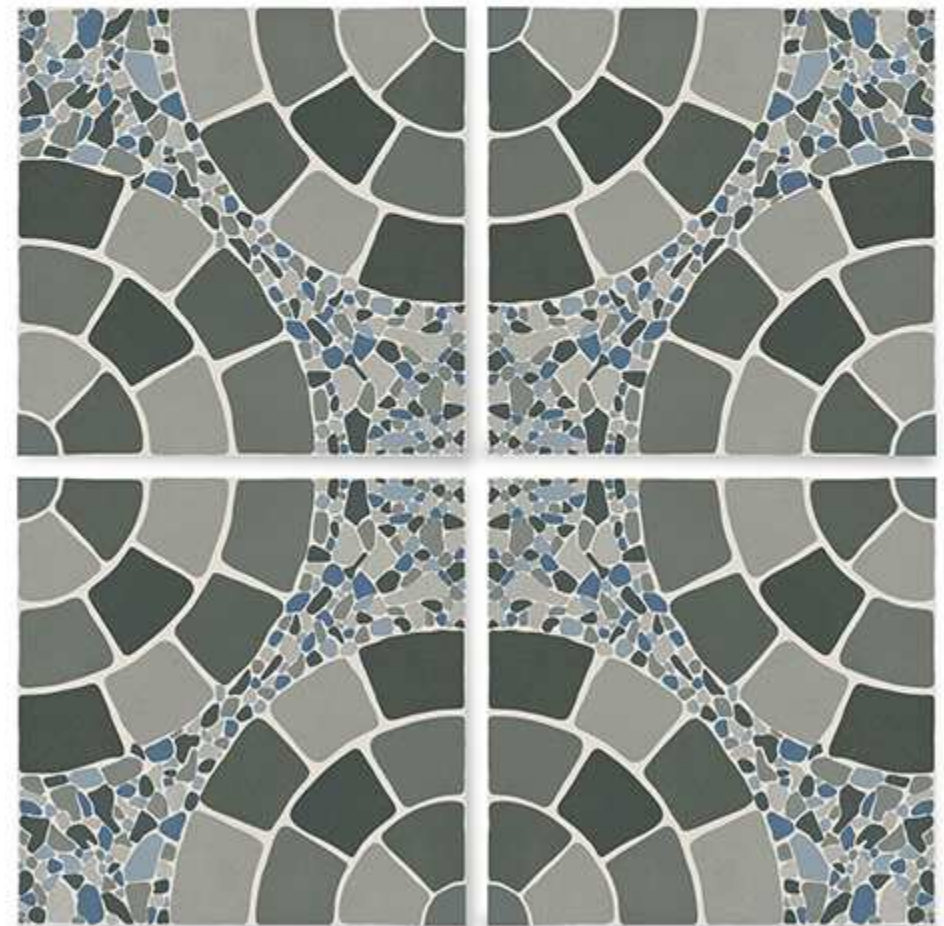

Applications






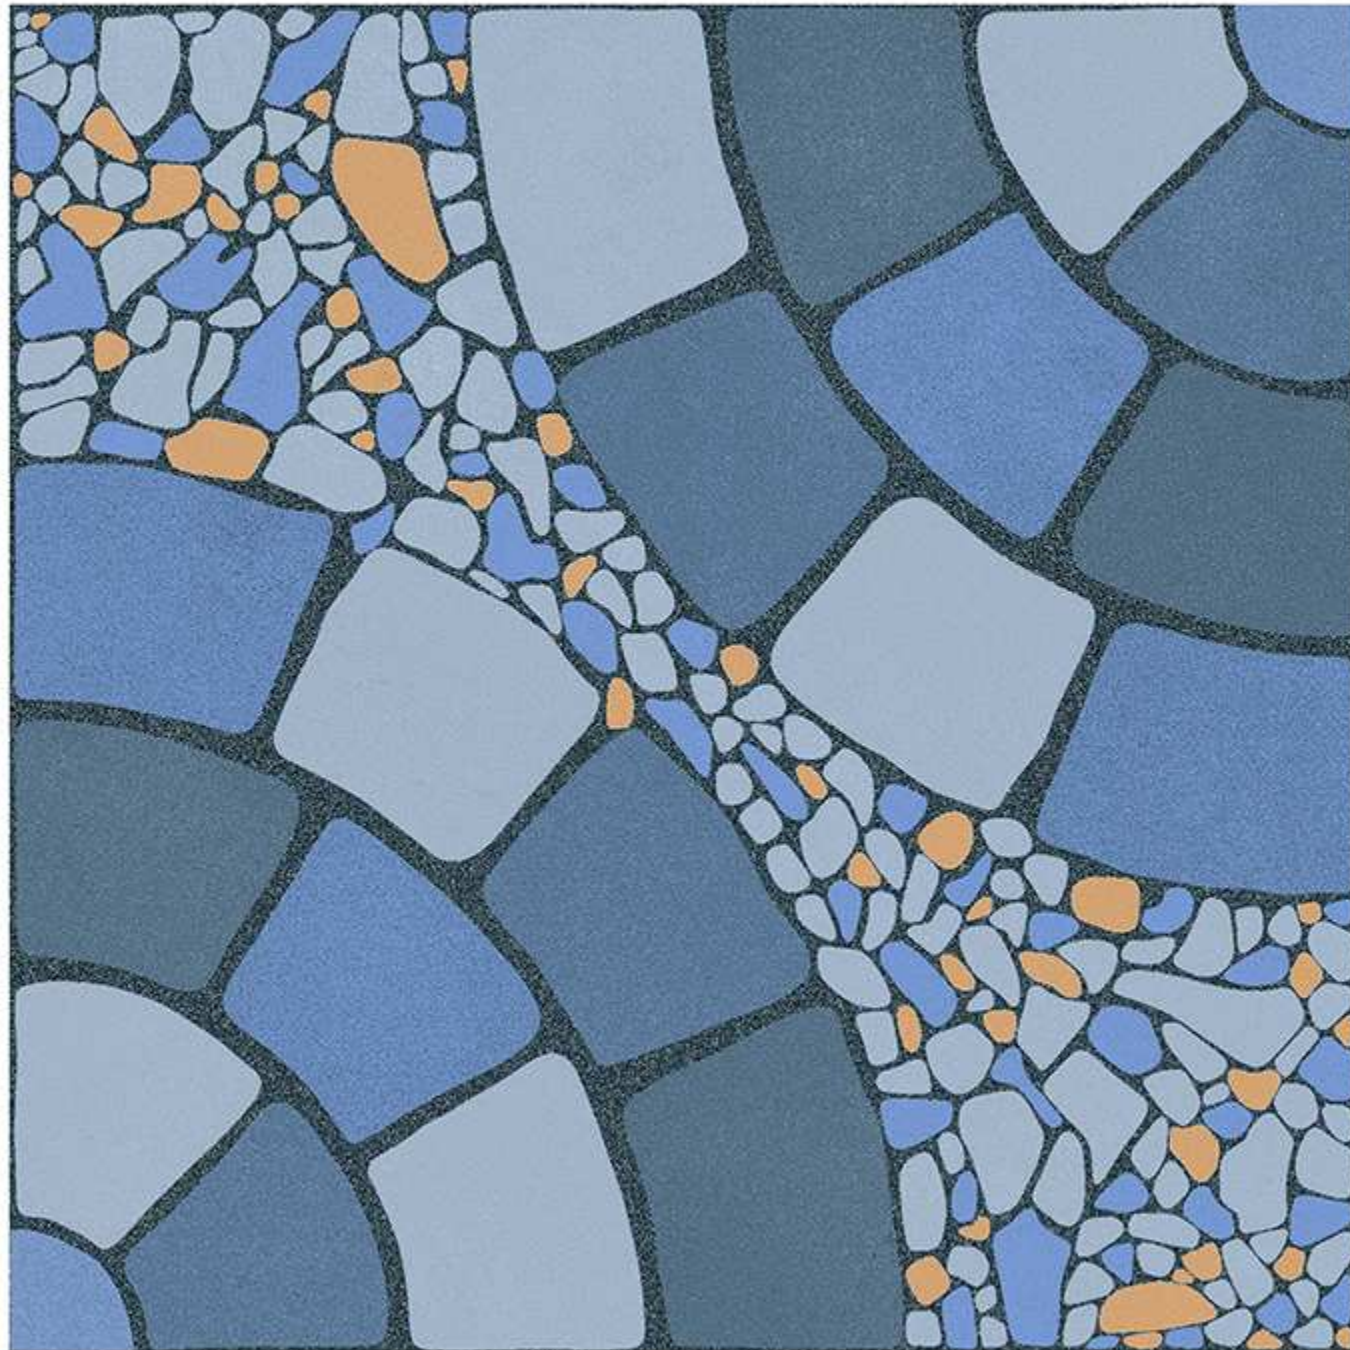

2510

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

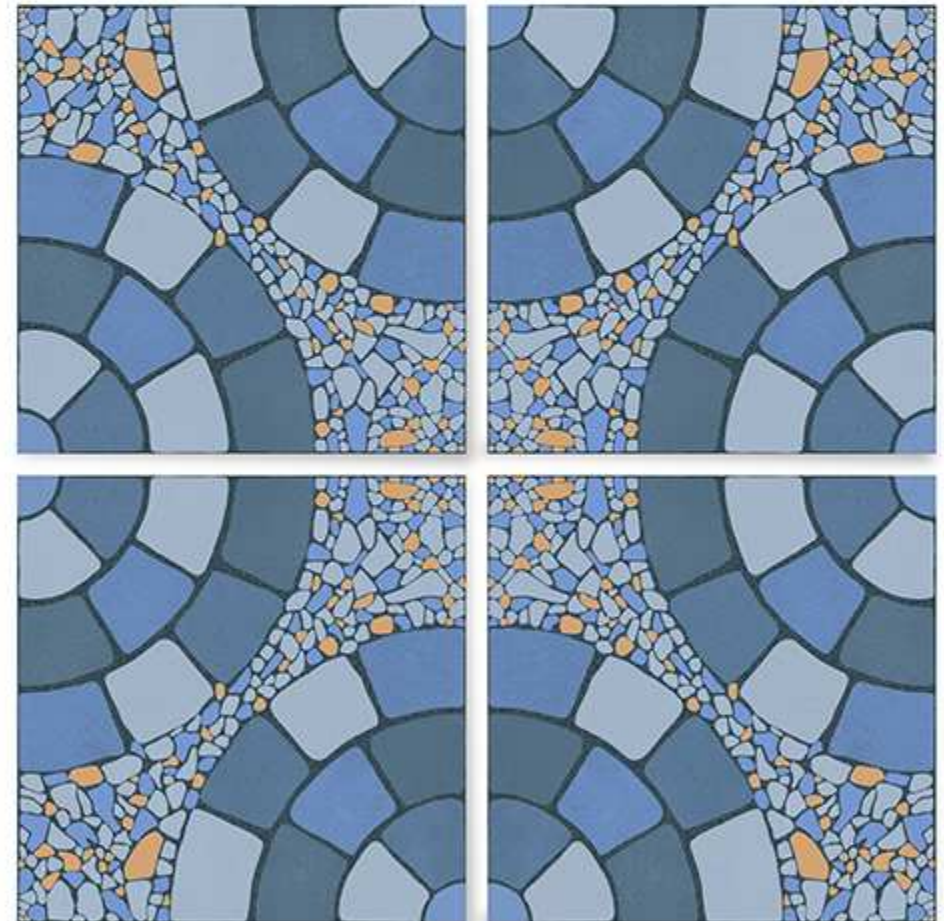


Applications





2513

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

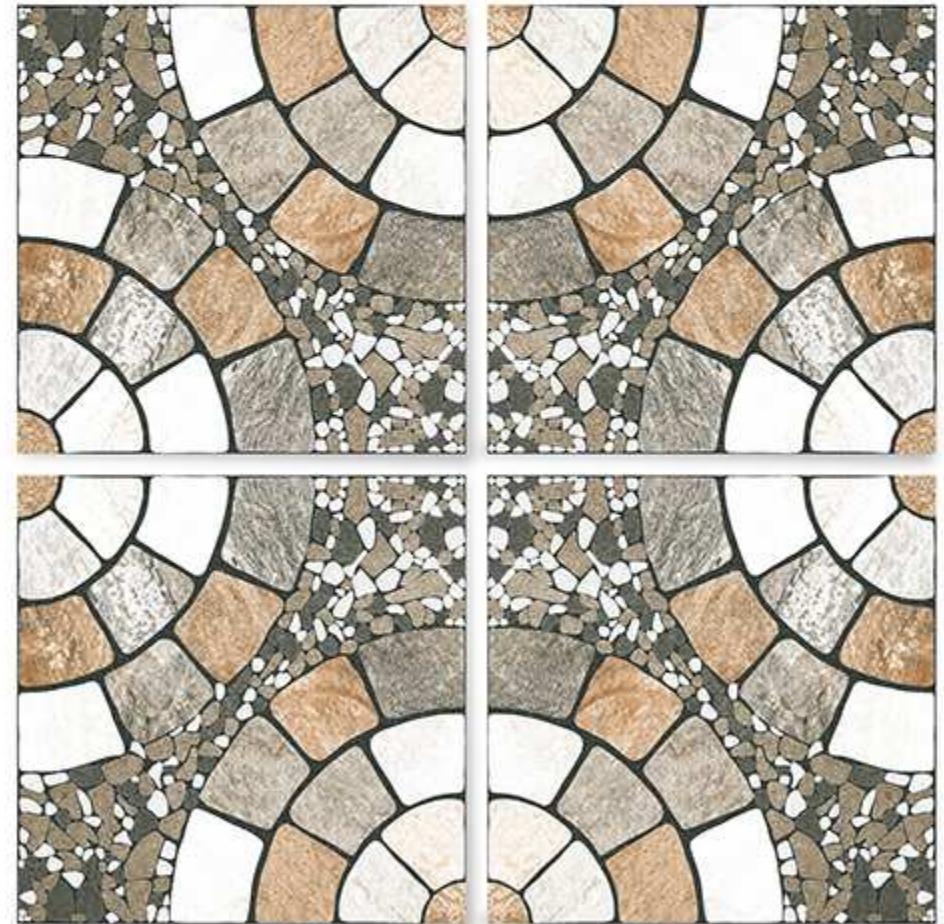

Applications








2518

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

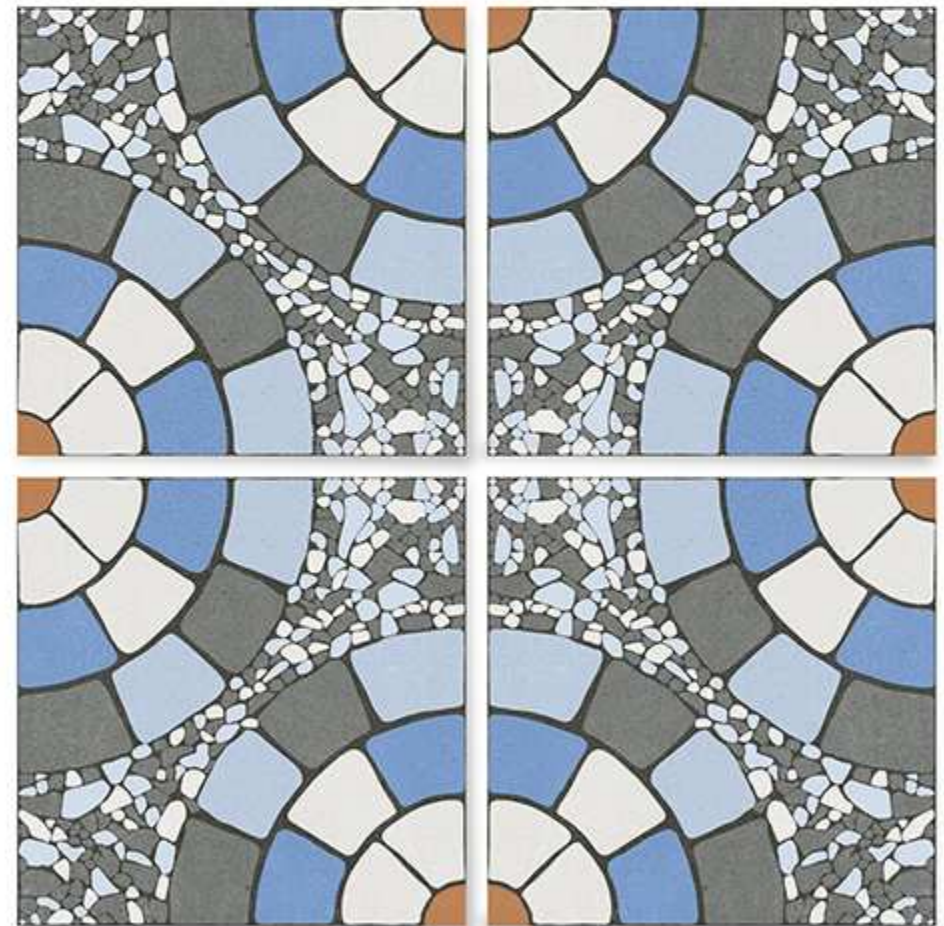

Applications





TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group Bla	SAKET TILES Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	DIGITAL 400X400MM	12 MM	5 PCS	0.8	18 Kgs
1.	DIGITAL 400X400MM	10 MM	5 PCS	0.8	16 Kgs

Thank you

Saket

SAKET TILES INDIA LLP

info@sakrttiles.com

export@sakettiles.com

Survey No.454,
At-Shapar,Jashmatgadh,Jetpar Road
opp-pavadiyari bas stand, Morbi, Gujarat-363642